


 **PT. SINAR HIMALAYA**

System for Packing, Cartoning and Wrapping

Since 1974

PACKAGING MACHINE Catalog Product

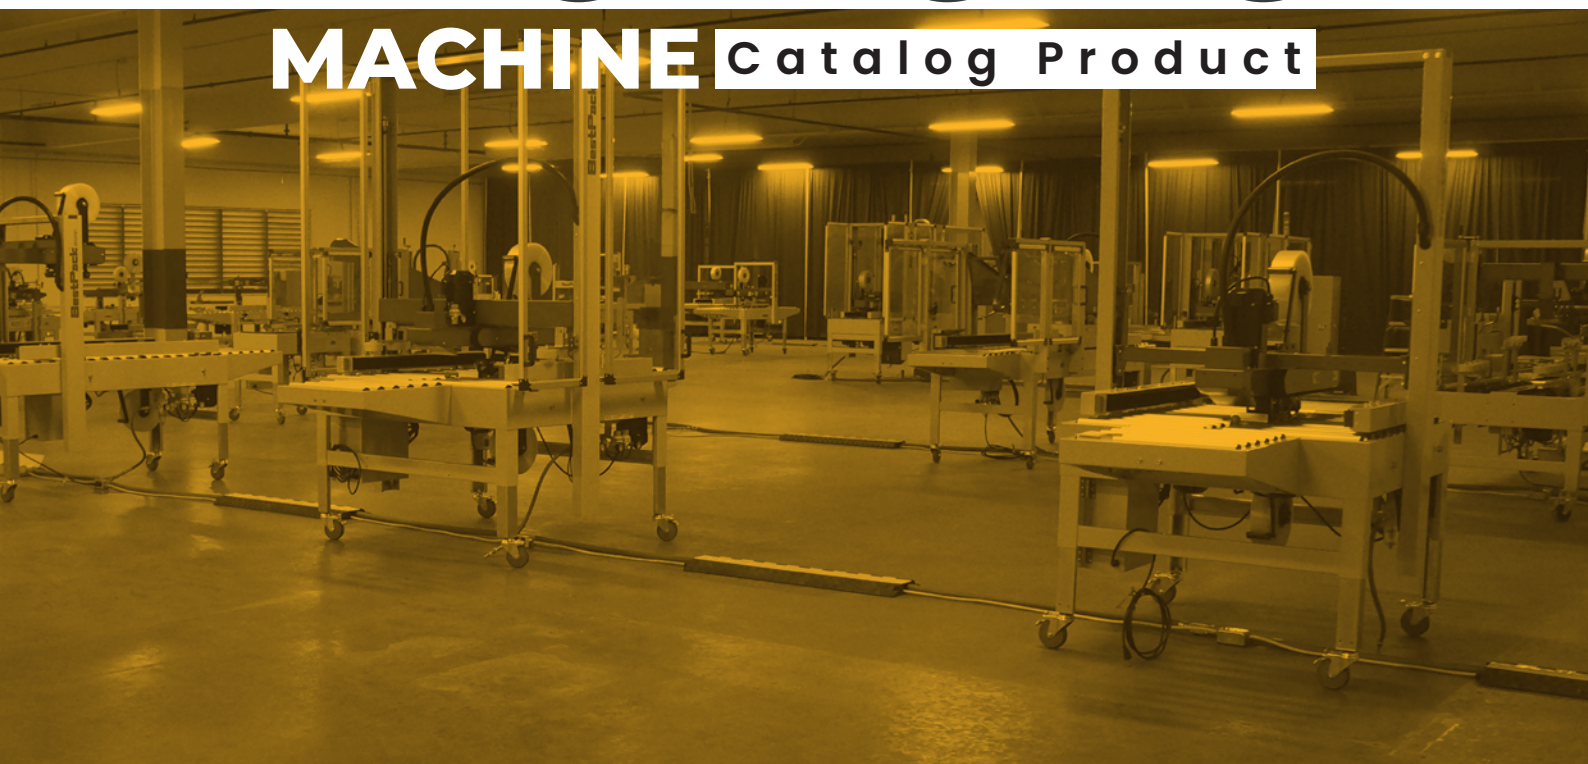

SCAN ME





Established on 1974, nature business focusing on Sales and Marketing of imported either Asia or Europe food and bakery machinery, packaging, pharmaceutical, woodworking, hotel / restaurant / cafe equipment and bakeware utensils, we deliver advanced technology and proven excellent quality, reliable and durable products, and authentic after sales

service at any time, providing more forefront services. We also maintain adequate inventory / stock level of genuine spare parts, equipments and accessories to ensure your equipments can be fixed promptly.

For almost four decades, thanks to our esteemed client's faithfully support and proponent, and based on constantly accumulated successful experience and competitive edge in developing the business, we are expanding our business vigorously while implementing product diversification, supplying products to the development trend, whatever products you may need, you will almost be able to find one suitable to your requirement. Currently our clients ranging from large scale to small scale factories, laboratory, wholesalers and retailers, hypermarket/supermarket chain stores, hotels, restaurants, cafes, bakery shops, cake shops, home users, personal etc.

We market the products to all over Indonesia with the marketing area include :

- a) Jakarta Office : Covering Greater Jakarta, West Java, Banten Province & West Kalimantan.
- b) Surabaya Office : Covering East Java, East Kalimantan, South Kalimantan, Central Kalimantan, North Kalimantan and eastern part of Indonesia.
- c) Semarang Office : Covering Central Java and Yogyakarta.
- d) Medan Office : Covering Sumatra Island and surrounding.

Differentiation or uniqueness of our company compared with our competitors are :

- a) We carry out services to all customers, supply service parts by our own technicians, including machine installation, commissioning and operator training until the machine can operate well with no charges.
- b) We have adequate inventory and stock level of genuine spare parts, equipment and accessories in our warehouse, assuring the machine can be fixed promptly.
- c) We cater after sales service.
- d) We have a team of technicians who are ready to be contacted any time.

With the support of all parties, we believe that we can provide the best services to our customers which are widely spread all over Indonesia, especially western part of Indonesia (Jakarta, Surabaya, Semarang, Medan and the eastern part of Indonesia).

Finally, we would like to thank you for the trust and opportunity that you have given to cooperate together in developing importation business in Indonesia.



BestPack

Automatic Quad Drive Carton Sealer

| | |
|---------------------------------|-------------------------------|
| Model | AQ22-2 |
| Power Requirements | 110 Volts 60Hz 1 Phase |
| Air Requirements | 45-60 PSI, 4-5 SCFM |
| Capacity (ctn/min) | 34 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 572-762 |
| Carton Size (mm) | L.152-699xW.191-508xH.140-508 |
| Machine Dimension (mm) | L.1969xW.859xH.1854 |
| Net Weight (Kg) | 293 |



BestPack

Automatic Uniform Side Drive

| | |
|---------------------------------|-------------------------------|
| Model | AS22-2 |
| Power Requirements | 110 Volts 60Hz 1 Phase |
| Air Requirements | 45-60 PSI, 4-5 SCFM |
| Capacity (ctn/min) | 34 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 572-762 |
| Carton Size (mm) | L.152-699xW.152-508xH.140-508 |
| Machine Dimension (mm) | L.1974xW.859xH.1753 |
| Net Weight (Kg) | 265 |



BestPack

Random Quad Drive Carton Sealer

| | |
|---------------------------------|-------------------------------|
| Model | ASD22-2 |
| Power Requirements | 110 Volts 60Hz 1 Phase |
| Air Requirements | 45-60 PSI, 4-5 SCFM |
| Capacity (ctn/min) | 34 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 572-762 |
| Carton Size (mm) | L.201-650xW.135-508xH.109-508 |
| Machine Dimension (mm) | L.1702xW.914xH.1684 |
| Net Weight (Kg) | 215 |



BestPack

Automatic Top and Bottom Drive Four Edge Carton Sealer

| | |
|---------------------------------|---------------------------------|
| Model | AT4E22-3 |
| Power Requirements | 110 Volts 60Hz 1 Phase |
| Air Requirements | 80 PSI, 10 SCFM |
| Capacity (ctn/min) | 6 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | Determined at The Time Of Order |
| Carton Size (mm) | L.262-597xW.250-597xH.250-597 |
| Machine Dimension (mm) | L.2004xW.1232xH.1600 |
| Net Weight (Kg) | 667 |



KING PACK

Semi-automatic Carton Flaps Folding Machine

| | |
|-----------------------------|----------------------------|
| Model | GPC-50D |
| Production Speed (ctns/min) | 0-20 |
| Carton Size (mm) | L200-500xW150-500xH150-500 |
| Power Supply | 220/380V, 50Hz, 1/3 Phase |
| Power (Watt) | 240 |
| Adhesive Tape Width (mm) | 48/60/75 |
| Machine Dimension (mm) | L1770xW.850xH.1520 |
| Net Weight (Kg) | 250 |



HUALIAN MACHINERY

Automatic Folding Sealing Machine

| | |
|---------------------------------|-------------------------------|
| Model | FXJ-5050Z |
| Power Requirements | 220 Volts 50Hz 110 Volts 60Hz |
| Power (w) | 260 |
| Air Requirements (Mpa) | 0.4-0.6 |
| Capacity (ctn/min) | 25 (Depend on Carton Quality) |
| Speed (m/min) | 22 |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 600-750 |
| Carton Size (mm) | L.180-600xW.180-500xH.160-500 |
| Machine Dimension (mm) | L.1830xW.920xH.1450-1600 |
| Width of Adhesive Tape (mm) | 48/60/76 (Optional) |
| Net Weight (Kg) | 250 |



Manual Side Drive Dual Mast Carton Seal

BestPack

| | |
|---------------------------------|---|
| Model | MSD22-2 |
| Power Requirements | 110 Volts 60Hz 1 Phase |
| Capacity (ctn/min) | 40 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 597-762 |
| Carton Size (mm) | L.152-UxW.108-508xH.89-521 (Only For MSD22-2) |
| Machine Dimension (mm) | L.1003xW.833xH.1786 |
| Net Weight (Kg) | 155 |



Manual Top & Bottom Drive Dual Mast Sealer

BestPack

| | |
|---------------------------------|--|
| Model | MTD22-2 |
| Power Requirements | 110 Volts 60Hz 1 Phase |
| Capacity (ctn/min) | 40 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 597-762 |
| Carton Size (mm) | L.152-UxW.165-490xH.102-508 (Only For MTD22-2) |
| Machine Dimension (mm) | L.897xW.732xH.1770 |
| Net Weight (Kg) | 157 |



Adhesive Tape Carton Sealer

HUALIAN
MACHINERY

| | |
|-----------------------------|-------------------------------|
| Model | FXJ-6050 |
| Voltage | 220 Volts 50Hz 110 Volts 60Hz |
| Power (w) | 200 |
| Capacity (ctn/min) | 30 (Depend on Carton Quality) |
| Speed (m/min) | 20 |
| Tape Head (inch) | 2 |
| Height of Table (mm) | 635-780 |
| Carton Size (mm) | L.-xW.180-500xH.130-600 |
| Machine Dimension (mm) | L.1755xW.800xH.960-1605 |
| Width of Adhesive Tape (mm) | 48/60/76 (Optional) |
| Net Weight (Kg) | 150 |



Semi Automatic Box Taping Machine Carton Sealer for BOPP

HUALIAN
MACHINERY

| | |
|-----------------------------|---|
| Model | FXJ-5050A |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Max. Carton Size (mm) | 500x500 |
| Min. Carton Size (mm) | 130x120 |
| Speed (m/min) | 20 m/min (30 cartons/min) |
| Height of Table (mm) | 580-780 |
| Width of Adhesive Tape (mm) | 48, 60, 76 (optional) |
| Dimensions (mm) | 1730x950x(960-1550) |
| Weight (kg) | 120 |
| Max. Conveyor Load (kg) | 30 |
| Adhesive Tape Materials | BOPP, PVC adhesive tape, water-free adhesive tape |



Random Flap Folder And Carton Sealer

BestPack

| | |
|--------------------|--------------------------------|
| Model | CS22-2H |
| Power Requirements | 220 Volts 50Hz 1 Phase |
| Capacity (ctn/min) | 7-9 (Depend on Carton Quality) |
| Tape Head (inch) | 2 |
| Carton Size (mm) | L.190-700xW.130-500xH.120-550 |
| Net Weight (Kg) | 290 |



Fully Automatic Random Four Edge Carton Sealer

BestPack

| | |
|--------------------|-------------------------------|
| Model | CT4E22-3 |
| Power Requirements | 110 Volts 60Hz 1 Phase |
| Air Requirements | 100 PSI, 10 CFM |
| Capacity (ctn/min) | 6 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Carton Size (mm) | L.300-600xW.250-600xH.250-600 |
| Dimension (mm) | L.2500xW.1350xH.1710 |

BestPack



Random Carton Sealer

| | |
|---------------------------------|-------------------------------|
| Model | RQ22-2 |
| Power Requirements | 110 Volts 60Hz 1Phase |
| Air Requirements | 80 PSI, 10 SCFM |
| Capacity (ctn/min) | 15 (Depend on Carton Quality) |
| Tapping Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 521-762 |
| Carton Size (mm) | L.178-UxW.191-533xH.114-508 |
| Dimension (mm) | L.1087xW.879xH.1461 |
| Net Weight (Kg) | 287 |

MANUKAN
MACHINERY

Automatic L-Type Suction Cup Case Erector

| | |
|---------------------------------|---|
| Model | ELVS11-2 |
| Power Requirements | 110 Volts 60Hz 1Phase |
| Air Requirements | 80 PSI, 10 SCFM |
| Capacity (ctn/min) | 5 (Depend on Carton Quality) |
| Tape Head (inch) | 2 or 3 |
| Conveyor Height Adjustment (mm) | 648-800 |
| Carton Size (mm) | L.190-450xW.110-320xH.150-380 (Only For ELVS11-2) |
| Machine Dimension (mm) | L.2200xW.1900xH.1460 |
| Net Weight (Kg) | 815 |



KING PACK

Side Drive Automatic Unpacking Machine

| | |
|---------------------------------|---------------------------------|
| Model | FM-K500 |
| Power Requirements | 220/380 Volts 50Hz |
| Maximum Power Consumption (Kw) | 0.18 |
| Pressure (Kgf/cm ²) | 6 |
| Capacity (ctn/min) | 5-10 (Depend on Carton Quality) |
| Transfer Speed (m/min) | 20 |
| Tape Width (mm) | 48/60/75 |
| Conveyor Height Adjustment (mm) | 521-762 |
| Carton Size (mm) | L.280-500xW.160-400xH.180-400 |
| Machine Dimension (mm) | L.2070xW.2040xH.1470 |
| Net Weight (Kg) | 495 |



KING PACK

Automatic Box Opening Machine

| | |
|--|---|
| Model | GPK-40 |
| Carton Opening Speed | 12 boxes/min |
| Carton Size Carton Range | L250-450xW150-400xH100-400mm (minimum cannot exist at the same time) |
| Power Supply | 220V 50/60Hz 1 Phase |
| Power | 240W |
| Adhesive Tape Width | 48/60/75mm (choose one to use) |
| Carton Storage Quantity | 80-100pcs (800-1000mm) |
| Air Consumption | 450NL/min |
| Air Compressing Necessary Air Pressure | 6kg/cm ³ |
| Table Height | 620+30mm |
| Machine Size | L2100xW2100xH1450mm |
| Machine Weight | 450Kg |



KING PACK

Automatic Box Opening Machine

| | |
|--|---|
| Model | GPK-40H18 |
| Carton Opening Speed | 18 boxes/min |
| Carton Size Carton Range | L250-450xW150-400xH100-400mm (L200 needs to be customized and non-standard, and the minimum cannot exist at the same time) |
| Power Supply | 220V 50/60Hz 1 Phase |
| Power | 240W |
| Adhesive Tape Width | 48/60/75mm (choose one to use) |
| Carton Storage Quantity | 80-100pcs (1000mm) |
| Air Consumption | 500NL/min |
| Air Compressing Necessary Air Pressure | 6kg/cm ³ |
| Table Height | 620+30mm |
| Machine Size | L2450xW2100xH1450mm |
| Machine Weight | 550Kg |





Continuous Band Sealer Machine

| | |
|---|---|
| Model | FRB-770II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 50 |
| Sealing Power (W) | 300x2 |
| Sealing Speed (m/min) | 0-12 (0-16) |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Printing Type | Steel wheel for embossing printing (optional) |
| Distance from Sealing Center to Conveyor Table (mm) | 150-270 |
| Conveyor Table Size (LxW) (mm) | 840x153 |
| Max. Conveyor Loading for Single Package (kg) | ≤1 |
| Overall Conveyor Loading (kg) | ≤3 |
| External Dimensions (LxWxH) (mm) | 840x380x450 |
| Weight (kg) | 28 |



Automatic Band Sealer

| | |
|---|---|
| Model | FRB-770III |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 50 |
| Sealing Power (W) | 300x2 |
| Sealing Speed (m/min) | 0-12 (0-16) |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Printing Type | Steel wheel for embossing printing (optional) |
| Distance from Sealing Center to Conveyor Table (mm) | 20-40 |
| Conveyor Table Size (LxW) (mm) | 840x153 |
| Max. Conveyor Loading for Single Package (kg) | ≤1 |
| Overall Conveyor Loading (kg) | ≤3 |
| External Dimensions (LxWxH) (mm) | 840x550x800 |
| Weight (kg) | 29 |



Horizontal Continuous Band Sealer

| | |
|---|---|
| Model | FR-770II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 50 |
| Sealing Power (W) | 300x2 |
| Sealing Speed (m/min) | 0-12 (0-16) |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Printing Type | Steel wheel for embossing printing (optional) |
| Distance from Sealing Center to Conveyor Table (mm) | 200-320 |
| Conveyor Table Size (LxW) (mm) | 840x180 |
| Max. Conveyor Loading for Single Package (kg) | ≤1 |
| Overall Conveyor Loading (kg) | ≤3 |
| External Dimensions (LxWxH) (mm) | 840x380x530 |
| Weight (kg) | 28 |



Plastic Bag Continuous Band Sealer

| | |
|---|---|
| Model | FR-770III |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 50 |
| Sealing Power (W) | 300x2 |
| Sealing Speed (m/min) | 0-12 (0-16) |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Printing Type | Steel wheel for embossing printing (optional) |
| Distance from Sealing Center to Conveyor Table (mm) | 20-40 |
| Distance from Base plate to Interior Conveyor (mm) | 65-85 |
| Conveyor Table Size (LxW) (mm) | 950x180 |
| Max. Conveyor Loading for Single Package (kg) | ≤1 |
| Overall Conveyor Loading (kg) | ≤3 |
| External Dimensions (LxWxH) (mm) | 840x550x800 |
| Weight (kg) | 29 |



Solid Ink Coding Sealer

| | |
|---|--|
| Model | FRBM-810II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 50 |
| Sealing Power (W) | 300x2 |
| Printing Heating Power (W) | 40x2 |
| Speed (m/min) | 0-12 (0-16) |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Printing Type | Solid-Ink Roller |
| Distance from Sealing Center to Conveyor Table (mm) | 20-40/200-320 |
| Conveyor Table Size (LxW) (mm) | 954x153 |
| Max. Conveyor Loading for Single Package (kg) | ≤1 |
| Overall Conveyor Loading (kg) | ≤3 |
| External Dimensions (LxWxH) (mm) | 950x420x315 (Horizontal) 955x345x625 (Vertical) |
| Weight (kg) | 37.5 |



Automatic Heat PVC Film Band Sealer

| | |
|---|------------------|
| Model | FRM-1120LD |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Motor Power (W) | 245 |
| Sealing Power (W) | 400x2 |
| Printing Heating Power (W) | 40x2 |
| Speed (m/min) | 0-10 |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Printing Type | Solid-Ink Roller |
| Distance from Sealing Center to Conveyor Table (mm) | 100-700 |
| Conveyor Size (LxW) (mm) | 1400x250 |
| Overall Conveyor Loading (kg) | ≤15 |
| External Dimensions (LxWxH) (mm) | 1450x680x1480 |
| Weight (kg) | 136 |



Automatic Heavy Packaging Machine

| | |
|---|------------------|
| Model | FRM-1370AL/M |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Motor Power (W) | 750 |
| Sealing Power (W) | 300x4 |
| Speed (m/min) | 8 |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Distance from Sealing Center to Conveyor Table (mm) | 330-530 |
| Conveyor Size (LxW) (mm) | 1900x300 |
| Max. Conveyor Loading for Single Package (kg) | ≤20 |
| Overall Conveyor Loading (kg) | ≤60 |
| External Dimensions (LxWxH) (mm) | 2140x550x1100 |
| Weight (kg) | 180 |



Aerating and Air Suction Continuous Band Sealing Machine

| | |
|---|------------------|
| Model | FRS-1010II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Motor Power (W) | 50 |
| Suction Pump Power (W) | 750 |
| Sealing Power (W) | 300x2 |
| Printing Heating Power (W) | 40x2 |
| Speed (m/min) | 0-12 |
| Sealing Width (mm) | 10 |
| Temperature Range (°C) | 0-300 |
| Printing Type | Solid Ink Roller |
| Distance from Sealing Center to Conveyor Table (mm) | 10-40 |
| Distance from Base Plate to Interior Conveyor (mm) | 68-85 |
| Conveyor Table Size (LxW) (mm) | 930x153 |
| Overall Conveyor Loading (kg) | ≤10 |
| External Dimensions (LxWxH) (mm) | 1050x550x900 |
| Weight (kg) | 67 |
| Diameter of Nozzle for Air Flushing Source (mm) | 8 |



HUALIAN
MACHINERY

Pneumatic Heavy Bag Sealer

| | |
|---|-----------------------|
| Model | QF-600L(S) |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Sealing Power (W) | 500 (800) |
| Air Compressor (W) (Mpa) | 0.5(Equipped by User) |
| Seal Length (mm) | 600, 800, 1000 |
| Seal Width (mm) | 10 |
| Distance from Sealing Center to Conveyor (mm) | 1140 |
| Film Thickness(single layer)(mm) | ≤0.18 |
| Max. Package Sealing load (mm) | 200-750 |
| Max. Sealing Load(kg) | 50 |
| Adjustable angle of Pressing Head (°C) | 20 |
| External Dimensions (LxWxH) (mm) | 945x725x1420 |
| Weight (kg) | 80 |



HUALIAN
MACHINERY

Blister Sealing Packaging Machine

| | |
|----------------------------|------------------|
| Model | XBF-500 |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Sealing Power (W) | 1500 |
| Pressure Board Area (mm) | 500x300 |
| Turntable Diameter (mm) | φ1000 |
| Max. Package Height (mm) | 150 |
| Max. Conveyor Loading (kg) | 110 |
| Dimensions (LxWxH) (mm) | 920x1070x1520 |
| Weight (kg) | 70 |



HUALIAN
MACHINERY

Induction Bottle Cap Sealer Machine

| | | | | |
|-------------------------|------------------|------------------|------------------|------------------|
| Model | DGYF-S500A | DGYF-S500B | DGYF-S500C | DGYF-S500D |
| Voltage (V/Hz) | AC 220/50 110/60 | AC 220/50 110/60 | AC 220/50 110/60 | AC 220/50 110/60 |
| Power (W) | 500 | 500 | 600 | 500 |
| Sealing Diameter (mm) | Ø20-Ø100 | Ø15-Ø35 | Ø60-Ø130 | Ø20-Ø60 |
| Dimensions (LxWxH) (mm) | 340x290x150 | 340x290x150 | 340x290x150 | 340x290x150 |
| Weight (kg) | 5 | 5 | 5 | 5 |



HF-2500 (Conveyor)



HF-2500 (Stainless Stand)

ProKing

Induction Aluminum Foil Sealing Series

| | | |
|---------------------|--------------------|---------------------------|
| Model | HF-2500 (Conveyor) | HF-2500 (Stainless Stand) |
| Power Output (W) | Max 2500 | Max 2500 |
| Input Voltage | 220V / 1ph | 220V / 1ph |
| Max. Current (A) | 15A | 15A |
| Cap Diameter (mm) | 16-60/16-80/60-120 | 16-60/16-80/60-120 |
| Belt Speed (m/min) | Max: 12 | x |
| Cooling System | Liquid Cooled | Liquid Cooled |
| Generator Type | MOS-FET | MOS-FET |
| Frequency (KHZ) | 40-100 | 40-100 |
| Generator Size (mm) | 260x560x2460 | 260x560x2460 |
| Dimensions (mm) | 1520x760x1660 | 1140x780x1600 |
| Weight (kg) | 128 | 96 |



Table Style Induction Sealing Machine

| | |
|----------------------------------|---------------------------------|
| Model | LGYF-1500AI |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1500 |
| Sealing Diameter (mm) | Ø20-Ø50 |
| Bottle Height (mm) | 40-200 |
| Sealing Speed (m/Min) | 3-10 |
| Load of conveyor(kg) | ≤20 |
| Housing material | cold rolled sheet spray housing |
| Housing protection grade | IP2I |
| External Dimensions (LxWxH) (mm) | 1150x480x400 |
| Weight (kg) | 38 |



Pedal Impulse Sealer

| Model | PFS-350 | PFS-450 | PFS-650 |
|-------------------------|------------------|------------------|------------------|
| Voltage (V/Hz) | AC 220/50 110/60 | AC 220/50 110/60 | AC 220/50 110/60 |
| Power (W) | 1200 | 1250 | 1500 |
| Sealing Length (mm) | 350 | 450 | 650 |
| Sealing Width (mm) | 2/3/5/8/10 | 2/3/5/8/10 | 2/3/5/8/10 |
| Heat Time (sec) | 0-2.5 | 0-2.5 | 0-2.5 |
| Dimensions (LxWxH) (mm) | 450x540x880 | 550x540x880 | 700x570x880 |
| Weight (kg) | 19 | 21 | 24 |



GK9-2



GK26-1A



Manual Bag Closing Machine

| Model | GK9-2 | GK26-1A |
|---------------------------------|------------------------------|---------------------|
| Spec. of Motor (V/Hz) | 220/50 110/60 | 220/50 110/60 |
| Max. Length of Thread Mark (mm) | 8 | Polyester 20/6(2x3) |
| Spec. of Sewing Needle | No.26 | No.25 |
| Spec. of Sewing Thread | 20 branches 6-9 vinylon line | ≥6.5 |
| Sewing Speed (Stitches/min) | 800 | 1250 |
| Dimensions (LxWxH) (mm) | 268x160x330 | 235x245x295 |
| Weight (kg) | 4.5 | 5.5 |



Locking Capping Machine



| Model | DK-50/D | DK-50/D |
|-------------------------------|-------------|-------------|
| Power supply (V/Hz) | 220/50 | 220/50 |
| Power (kw) | 0.37 | 0.37 |
| Operation Type | Electric | Electric |
| Cap Diameter (mm) | φ20-φ40 | φ25-φ40 |
| Applicable bottle height (mm) | 100-300 | 50-320 |
| Capacity (bottles/h) | ≤1200 | ≤1200 |
| Type of cap | Metal cap | Metal cap |
| Dimensions (mm) | 350x250x650 | 650x200x920 |
| Weight (kg) | 65 | 65 |

Seaming Machine



Vacuum Nitrogen Machine

| | |
|-------------------|----------------------------------|
| Model | DH-FK-502 |
| Speed | 6-7 cans/min |
| Remaining oxygen | ≤3% |
| Can size | φ73-φ131mm/H100-190mm |
| Power supply | 3Phase 208-415V 50/60Hz |
| Total power | 4.55kw (Include Vacuum pump 3kw) |
| Air supply | 6kg/cm 0.125cbm/min |
| Need Nitrogen | 3.5cbm/hour/set |
| Nitrogen | Purity >99.99%, Pressure:0.4Mpa |
| Overall dimension | 1400x600x1752mm |
| Total weight | 400kg |



Semi Automatic Can Seamer

| | |
|------------------------------|---------------------|
| Model | KP-N2 |
| Sealing Head | 1 |
| Sealing Speed (cans/min) | 25-32 |
| Sealing Height (mm) | 50-200 (Adjustable) |
| Applicable Can Diameter (mm) | 25-157 |
| Roller Material | Chromium Steel |
| Power Supply (V/Hz) | 220/50 |
| Power (Kw) | 0.25-0.35 |
| Machine Dimension (mm) | L.630xW.400x1350 |
| Weight (Kg) | 150 |



Strapping Packaging Machine

| | |
|----------------------------------|---------------------------------|
| Model | KZB-II |
| Voltage (V/Hz) | AC 220/50 |
| Power (W) | 320 |
| Max. Strapping Size(LxH) (mm) | Not stipulated |
| Strapping Speed(sec/cycle) | 2.5 |
| Strapping Force(V/Hz) (N) | 10-450(Adjustable) |
| Height of Table (mm) | 500 |
| Width of strap used(mm) | plastic strap 6-15 (Adjustable) |
| External Dimensions (LxWxH) (mm) | 1450x580x505 |
| Net Weight (kg) | 90 |



Table Type Semi Automatic Strapping Machine

| | |
|----------------------------------|---------------------|
| Model | KZB-T |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 90 |
| Strapping Speed(sec/cycle) | 1.8 |
| Strapping Force(V/Hz) (N) | 10-100 (Adjustable) |
| Width of strap used(mm) | 1-10 (Adjustable) |
| External Dimensions (LxWxH) (mm) | 665x335x205 |
| Net Weight (kg) | 18 |



Strapping Packaging Machine

| | |
|----------------------------------|---------------------------------|
| Model | SK-2 |
| Voltage (V/Hz) | AC 220/50 |
| Power (W) | 320 |
| Max. Strapping Size(LxH) (mm) | Not stipulated |
| Strapping Speed(sec/cycle) | 2.5 |
| Strapping Force(V/Hz) (N) | 10-450(Adjustable) |
| Width of strap used(mm) | plastic strap 6-15 (Adjustable) |
| External Dimensions (LxWxH) (mm) | 1450x580x505 |
| Net Weight (kg) | 90 |



Semi Automatic Carton Strapping Machine

| | |
|----------------------------------|---------------------------------|
| Model | KZBD-A |
| Voltage (V/Hz) | AC 220/50 |
| Power (W) | 320 |
| Max. Strapping Size(LxH) (mm) | Not stipulated |
| Strapping Speed(sec/cycle) | 2.5 |
| Strapping Force(V/Hz) (N) | 10-450(Adjustable) |
| Height of Table (mm) | 500 |
| Width of strap used(mm) | plastic strap 6-15 (Adjustable) |
| External Dimensions (LxWxH) (mm) | 1450x580x675 |
| Net Weight (kg) | 91 |



Manual Box Strapping Machine

| | |
|----------------------------------|---------------------------------|
| Model | KZB-A |
| Voltage (V/Hz) | AC 220/50 |
| Power (W) | 320 |
| Max. Strapping Size(LxH) (mm) | Not stipulated |
| Strapping Speed(sec/cycle) | 2.5 |
| Strapping Force(V/Hz) (N) | 10-450(Adjustable) |
| Height of Table (mm) | 750 |
| Width of strap used(mm) | plastic strap 6-15 (Adjustable) |
| External Dimensions (LxWxH) (mm) | 900x580x750 |
| Net Weight (kg) | 95 |



Automatic Strap Machine

| | |
|----------------------------------|---------------------------------------|
| Model | KZ-8060/D |
| Voltage (V/Hz) | AC 380/50 220/60 3Phase |
| Power (W) | 1000 |
| Max. Strapping Size(LxH) (mm) | 800x600 |
| Strapping Speed(sec/cycle) | ≤2.5 |
| Strapping Force(V/Hz) (N) | 25-700(Adjustable) |
| Width of strap used(mm) | plastic strap 9-15, thickness 0.5-1.1 |
| Height of Table (mm) | 750 |
| External Dimensions (LxWxH) (mm) | 1400x620x1470 |
| Net Weight (kg) | 240 |



සුඛාලීන
MACHINERY

Automatic Strapping Machine with Line

| | |
|----------------------------------|---------------------------------------|
| Model | KZW-8060/D |
| Voltage (V/Hz) | AC 380/50 220/60 3Phase |
| Power (W) | 1400 |
| Max.Strapping Size(LxH) (mm) | 740x600 |
| Strapping Speed(sec/cycle) | ≤2.5 |
| Strapping Force(V/Hz) (N) | 25-700(Adjustable) |
| Width of strap used(mm) | plastic strap 9-15, thickness 0.5-1.1 |
| Height of Table (mm) | 750 |
| External Dimensions (LxWxH) (mm) | 1580x620x1470 |
| Net Weight (kg) | 300 |



සුඛාලීන
MACHINERY

Table-style Vacuum Packaging Machine

| | |
|-----------------------------------|--------------------|
| Model | DZ-260PD |
| Dimensions (LxWxH) (mm) | 335x488x360 |
| Voltage (V/Hz) | AC 220/50 110/60Hz |
| Motor Power (W) | 370 |
| Sealing Power (W) | 200 |
| Final Vacuum (KPa) | 1 |
| No. of Seal Bars for Each Chamber | 1 |
| Chamber Dimension (mm) | 282x385x100 |
| Pump Capacity (m³/hr) | 8 |
| Net Weight (Kg) | 35 |



සුඛාලීන
MACHINERY

Able Vacuum Packaging With Gas Flushing

| | |
|-------------------------------------|------------------|
| Model | DZQ-400T |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Motor power (W) | 900 |
| Sealing Power (W) | 500 |
| Final Vacuum (KPa) | 1 |
| No. of Sealing Bars | 1 |
| Sealing Length & Sealing Width (mm) | 370x10 |
| Pump Capacity (m³/h) | 20 |
| Chamber Dimensions (LxWxH) (mm) | 406x456x190 |
| External Dimensions (LxWxH) (mm) | 486x570x504 |
| Net Weight (Kg) | 77 |



සුඛාලීන
MACHINERY

Vacuum Chamber Sealer

| | |
|----------------------------------|-------------------------|
| Model | DZ-400/2E |
| Voltage (V/Hz) | AC 380/50 220/50 110/60 |
| Motor power (W) | 900 |
| Sealing Power (W) | 450 |
| Ultimate Vacuum Pressure (Kpa) | 1 |
| Sealing Width (mm) | 10 |
| Chamber Dimension (LxWxH) (mm) | 440x420x140 |
| Vacuum Pump capacity (m3/h) | 20 |
| External Dimensions (LxWxH) (mm) | 480x535x1010 |
| Net Weight (Kg) | Approx.91 |



සුඛාලීන
MACHINERY

Vacuum Sealing By Nozzle

| | |
|----------------------------------|-------------------------|
| Model | DZ-1000/2L |
| Voltage (V/Hz) | AC 380/50 220/50 110/60 |
| Motor power (W) | 1800 |
| Sealing Power (W) | 1500 |
| Ultimate Vacuum Pressure (Kpa) | 1 |
| Sealing Width (mm) | 10 |
| Chamber Dimension (LxWxH) (mm) | 1006x606x190 |
| Vacuum Pump capacity (m3/h) | 2x20 |
| External Dimensions (LxWxH) (mm) | 1086x720x1005 |
| Net Weight (Kg) | Approx.222 |



VAC-STAR

Mobile Vacuum Machines

| | |
|----------------------------------|---------------|
| Model | S-225M ST |
| Maximum Bag Size (WxL) (L*) (mm) | 470x460 (510) |
| Pump Output (m³/h) | 20/(40) |
| Sealing Bar Length | 2x470 |
| Number of Sealing Bars | 2 |
| Distance X (space btw bars) | 410 |
| Chamber Dimension | 510x480x210 |
| Device Dimension | 580x660x980 |
| Weight (Kg) | 90 |
| Connection (V) | 230*2 |



Single Chamber Vacuum Packaging Machine

| | |
|-------------------------|----------------------------|
| Model | J-V006W-Gas |
| Dimensions (LxWxH) (mm) | 920x800x1080 |
| Sealing Length (mm) | 800x1/601x1 Or 800x2/640x2 |
| Chamber Dimension (mm) | 840x710x230 |



Multipacker



| | |
|---------------------------------|-------------|
| Model | S-220MP |
| Exterior Dimensions (mm) | 840x600x420 |
| Chamber Dimensions (WxDxH) (mm) | 425x410x175 |
| Welding Bar (mm) | 1x400 |
| Vacuum Pump (m ³ /h) | 20 |
| Max. Number of Trays | 4 |
| Max. Tray Size (mm) | 320x320x80 |
| Weight (Kg) | 85 |



Double Chamber Vacuum Packaging Machine

| | |
|--|-------------------------|
| Model | DZ-400/2SA |
| Voltage (V/Hz) | AC 380/50 220/50 110/60 |
| Motor power (W) | 750 |
| Sealing Power (W) | 600 |
| Ultimate Vacuum Pressure (Kpa) | 1.33 |
| Sealing Width (mm) | 10 |
| Chamber Dimension (LxWxH) (mm) | 500x500x110 |
| Vacuum Pump capacity (m ³ /h) | 20 |
| External Dimensions (LxWxH) (mm) | 990x720x900 |
| Net Weight (Kg) | 180 |



Mobile Vacuum Machines



| | |
|------------------------------------|---------------------|
| Model | S-240 DK |
| Voltage (V) | 230/400 |
| Motor power (W) | 2200 |
| Chamber Dimension (mm) | W.640xD.480xH.210 |
| Maximum Bag Size (mm) (L*1) | W.470xL.590 (640) |
| Sealing Bag Length (mm) | 4x470 |
| Number of Sealing Bar | 2 |
| Distance (Space Between Bars) (mm) | 540 |
| Pump Output (m ³ /h) | 63/100 |
| External Dimensions (mm) | L.1450xW.660xH.1030 |
| Net Weight (Kg) | 285 |



Single Chamber Vacuum Packaging Machine

| | |
|------------------------|----------------|
| Model | J-V006 |
| Chamber Dimension (mm) | 840x556x180 |
| Sealing Length (mm) | 800x2 or 520x2 |
| Machine Dimension (mm) | 920x655x1031 |



Double Chamber Vacuum Sealer

| | |
|--|-------------------------|
| Model | DZQ-400/2SA |
| Voltage (V/Hz) | AC 380/50 220/50 110/60 |
| Motor power (W) | 750 |
| Sealing Power (W) | 600 |
| Ultimate Vacuum Pressure (Kpa) | 1.33 |
| Sealing Width (mm) | 10 |
| Chamber Dimension (mm) | L.500xW.500xH.110 |
| Vacuum Pump capacity (m ³ /h) | 20 |
| Material for Vacuum Chamber | SUS304 |
| External Dimensions (mm) | L.990xW.720xH.900 |
| Net Weight (Kg) | 180 |



Continuous Automatic Vacuum Sealer Eco Friendly

| | |
|--------------------------------|----------------------|
| Model | HVB-1020F/2 |
| Voltage (V/Hz) | AC 380/50 220/60 |
| Motor power (W) | 550+370 |
| Sealing Power (W) | 3000 |
| Ultimate Vacuum Pressure (Kpa) | 1 |
| Cooling Type | Water Cooling |
| Sealing Length (mm) | 1020 |
| Sealing Width (mm) | 10 |
| Capacity(Times/min) | 08-Apr |
| Chamber Dimension (mm) | L.1080xW.500xH.80 |
| External Dimensions (mm) | L.1580xW.1770xH.1100 |
| Applied bag length(mm) | ≤190 |
| Net Weight (Kg) | 610 |



Continuous Belt Type Automatic Vacuum Packaging Machine With Injection Printing System

| | |
|------------------------|----------------|
| Model | J-V021P |
| Chamber Dimension (mm) | 1105x460x80 |
| Sealing Length (mm) | 1050x1 |
| Machine Dimension (mm) | 1775x2110x2056 |



Vacuum Heat Sealing Machine Manufacturers for Electronics

| | |
|--|---------------------|
| Model | DZ-800W |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Motor power (W) | 900 |
| Sealing Power (W) | 600 |
| Sealing Length (mm) | 800 |
| Sealing Width (mm) | 10 |
| Vacuum Pump Capacity (m ³ /h) | 20 |
| Film Thickness (Single Layer) (mm) | ≤0.18 |
| External Dimensions (mm) | L.920xW.1100xH.1200 |
| Net Weight (kg) | 95 |



Industrial Vacuum Sealer for Large Items with Gas Purge

| | |
|--|--------------------|
| Model | DZQ-600L(S) |
| Voltage (V/Hz) | AC 380/50 220/50 |
| Motor power (W) | 900 |
| Sealing Power (W) | 600 |
| Air Compressor Power (W) | 1100 |
| Sealing Length (mm) | 600 |
| Sealing Width (mm) | 10 |
| Distance from Sealing Center to Floor (mm) | 1250 |
| Vacuum Pump Capacity (m ³ /h) | 20 |
| Film Thickness (Single Layer) (mm) | ≤ 0.18 |
| External Dimensions (LxWxH) (mm) | L.800xW.900xH.1900 |
| Net Weight (kg) | 255 |



Manual Tray Vacuum Machine

| | |
|------------------------|------------------|
| Model | HTS-175 |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 500 |
| Output(Tray/h) | 350 |
| Temperature (°C) | 0-240 |
| Sealing area (mm) | Max. 175x125 |
| Machine Dimension (mm) | 350x200x200 |
| Sealing Width (mm) | 10 |



Semi Automatic Tray Vacuum Gas Flushing Packaging Machine

| | |
|--------------------------------------|--|
| Model | HVT-450M |
| Voltage (V/Hz) | AC 380/50 220/60 |
| Total Power (W) | 3 |
| Sealing Power (W) | 2 |
| Find Vacuum (Kpa) | 1 |
| Packing Capacity (times/min) | Sealing only 6-7 Vacuum Sealing 4-5 Vacuum Gas Filling Sealing 2-3 |
| Vacuum Pump Rate (m ³ /h) | 20 |
| Chamber Dimension (mm) | 450x300x80 |
| Standard Packing Tray Size (mm) | 230x165x45 |
| Dimensions (mm) | 1600x720x1380 |
| Net Weight (Kg) | 350 |



Semiautomatic Tray Sealer with Vacuum and Gas Flushing



| | |
|------------------------|--------------|
| Model | J-V052A |
| Chamber Dimension (mm) | 320x250x100 |
| Machine Dimension (mm) | 700x900x1480 |

The Tray Mould Can Be Design Accordingly



Semiautomatic Tray Sealer with Vacuum and Gas Flushing



| | |
|----------------------------------|---|
| Model | HVT-450A |
| Voltage (V/Hz) | AC 380/50 (Three Phase) |
| Power (Kw) | 4,43 |
| Sealing Power (Kw) | 2 |
| Ultimate Vacuum Pressure (KPa) | 1 |
| Gas Flushing | N2 or N2+CO2 |
| Pump Capacity (m³/h) | 63 |
| Capacity (times/min) | 10-12 for Only Sealing ; 3-5 for Vacuum, Gas Flushing and Sealing |
| Chamber Dimensions (mm) | L.450xW.200-400 |
| Cooling Type | Water Cooling |
| External Dimensions (L×W×H) (mm) | L.2800xW.950xH.1620 |
| Net Weight (Kg) | 670 |



Die Sets

Automatic Tray Sealer with Vacuum and Gas Flushing



| | |
|----------------------------|--------------------|
| Model | J-V057CA |
| Max. Tray Production | 4 |
| Max. Tray Dimension (mm) : | |
| 1 Tray | 270x590x100 (Dept) |
| 2 Tray | 270x277x100 (Dept) |
| 3 Tray | 270x172x100 (Dept) |
| 4 Tray | 270x120x100 (Dept) |
| Machine Dimension (mm) | 3340x1110x1550 |
| Cycle (cycle/min) | 10-Apr |



Automatic Thermoforming Rollstock Vacuum Packaging Machines



| | |
|--------------------------------|---------------------|
| Model | HVR-320A |
| Voltage (V/Hz) | AC 380/50 |
| Sealing Power (W) | 2000 |
| Air Source (Mpa) | 0.5-0.6 |
| Chamber Dimension (L×W×H) (mm) | L.284x(200-400) |
| Max. stretch depth (mm) | ≤80 |
| Vacuum Pump capacity (m3/h) | 100 or 160 or 200 |
| Capacity(Times/min) | 4-6 |
| Cooling Type | Water Cooling |
| Upper Film Width (mm) | 292 |
| Lower Film Width (mm) | 322 |
| External Dimensions (mm) | L.5000xW.950xH.2000 |
| Net Weight (Kg) | 1500 |



Cutting

Thermoforming Vacuum Packaging Machine-A



| | |
|----------------------------|---------------------|
| Model | A3210 |
| Width of Forming Film (mm) | 324 |
| Width of Sealing Film (mm) | 304 |
| Max. Packaging (mm) | 340x296 |
| Max. Forming Depth (mm) | 80 |
| Air Supply (bar) | 5-7 |
| Water Consumption (l/h) | 50-80 |
| Machine Dimension (mm) | 5000x930x2000 |
| Power | Apply to Using Area |



Cutting

Thermoforming Vacuum Packaging Machine-S



| | |
|----------------------------|---------------------|
| Model | S285 |
| Machine Dimension (mm) | 3700x815x2000 |
| Width of Forming Film (mm) | 289 |
| Width of Sealing Film (mm) | 269 |
| Max. Packaging (mm) | 296x261 |
| Max. Forming Depth (mm) | 80 |
| Air Supply (bar) | 5-7 |
| Water Consumption (l/h) | 50-80 |
| Power | Apply to Using Area |



Tray Vacuum Gas Packaging Machine

| | |
|----------------------------------|---|
| Model | HVT-450M/2 |
| Voltage (V/Hz) | AC380/50 (Three Phases) |
| Power (W) | 3680 |
| Sealing power (W) | 2000 |
| Ultimate vacuum pressure (KPa) | 1 |
| Gas Flushing | N2 or N2+CO2 |
| Pump Capacity (m³/h) | 63 |
| Capacity (times/min) | 10-12 for only sealing ; 3-5 for vacuum, gas-flushing and sealing |
| Chamber Dimensions (mm) | L.400xW.200-400 |
| Cooling Type | Water Cooling |
| External Dimensions (L×W×H) (mm) | L.1238xW.1500xH.1545 |
| Net Weight (Kg) | 650 |



Description :

This machine is for shortening pickling time while upgrading product freshness, increasing water content in pickles, maintaining tenderness and then improving product quality. This unit conforms to HACCP, easy to clean. It can rotate forward / reverse and adjust the speed. The time of vacuum, exhaust pressure and total time can be set as desired to fit various products' need. Easy and safe to discharge.

Vacuum Massage Tumblers Machine



| | |
|--------------------------|----------------|
| Model | J-VM3000 |
| Vacuum tank capacity (L) | 3000L |
| Machine Dimension (mm) | 2430x1521x2110 |

Description :

is made of stainless steel, in line with food hygiene and safety. Wheels are with brake. Programmable for data up to 10 set-ups. Each group can operate individually. Stainless steel mold also can be placed in the chamber to pack beans, coffee, grains and other square packaging products.

Suitable for big and stand-up packaging products with sauce. Providing stainless steel U shape plate to pack thinner products and flat plates to slightly adjust the height of packaging.



Deep Chamber Vacuum Packaging Machine



| | |
|------------------------|-------------|
| Model | J-V002D |
| Machine Dimension (mm) | 550x570x821 |
| Chamber Dimension (mm) | 470x425x260 |
| Sealing Length (mm) | 450x2 |



Description :

This machine can be handled by one person. Automatic conveyor belt from loading area into sealing chamber in order to save more time. This design of conveyor belt is easy to take off and change over. Hygienic design, easy to clean. Based on different needs from various products, it can also be used with shrink tank, dip tank or air drying equipment, etc.. Packing, shrinking, drying all at once. Reducing manual work.



Automatic In Line Belt Vacuum

| | |
|------------------------|----------------|
| Model | J-V032SCA |
| Machine Dimension (mm) | 2541x1111x1889 |
| Chamber Dimension (mm) | 1050x860x260 |
| Sealing Length (mm) | 800x2 |



Stainless Steel Shrink Tank Machine

| | |
|------------------------|------------------------|
| Model | D620 |
| Machine Dimension (mm) | 685x725x1296 |
| Tank Dimension (mm) | 625x450x406 |
| Water Heating | 3 Heaters, Total 12 Kw |
| Temperature Controller | Yes |
| Tank Volume (L) | 84 |
| Platform with Roller | Yes |
| Speed (cycles/min) | 2~3 |
| Power | 220V 3PH 50/60Hz |
| | 380V 3PH 50/60Hz |
| | 415V 3PH 50/60Hz |

Horizontal Packaging Machine



Application :

Mainly used for packing various regular and solid products such as cake, bread, biscuit, candy, chocolate, daily necessities, face mask, chemical product, medicine, etc.

Features :

1. Compact machine structure with smaller footprint area.
2. Carbon steel or stainless steel machine frame with nice appearance.
3. Optimized component design realizing fast and stable packing speed.
4. Servo control system with higher accuracy and flexibility mechanical motion.
5. Different optional configurations and functions meeting different specific requirements.
6. High accuracy of color mark tracking function.
7. Easy to use HMI with memory function.

Rotary Motion Flow Packaging Machine



| | | |
|--------------------------|---------------------------|--------------------------|
| Model | SZ180 (Single Cutter) | SZ180 (Dual Cutter) |
| Bag Size Range (mm) | L.120-500xW.35-160xH.5-60 | L.60-350xW.35-160xH.5-60 |
| Packing Speed (bags/min) | 30-150 | 30-300 |
| Packing Film Width (mm) | 90-400 | 90-400 |
| Power Supply | 220V 50Hz | 220V 50Hz |
| Total Power (kW) | 5 | 6.5 |
| Weight (kg) | 400 | 400 |
| Machine Size (mm) | 4000x930x1370 | 4000x930x1370 |



Automatic Multi-row Packaging Machine

| | |
|------------------------|--|
| Model | SCW 450/120 |
| Max Film Width | <450 |
| Packing Size | L:100-400xW:10-150xH:10-60mm |
| Production Capacity | 15-80bags/min |
| Dimension | 5000x900x1750mm |
| Film Material | Composite films suitable for heat-sealing packaging : Paper/PE, OPP/PE, PT/PE, AL/PE, etc. |
| Total Weight | 1000kg |
| Motor Power | One packaging machine motor 1.1KW; one or two 60W control motor. |
| Electric Heating Power | 450Wx2 / 400Wx4 |
| Power Supply | Single Phase 220V, 50Hz |
| Total Power | 3.66kw |



Automatic Upward-Film-Feeding Packaging Machine

| | |
|------------------------|--|
| Model | SF-D 450/120 |
| Max Film Width | <450mm |
| Packing Size | |
| L : Bag Length | L : 100-400mm |
| W : Product Width | W : 10-150mm |
| H : Product Height | H : 15-60mm |
| Production Capacity | 30-140 bags/min |
| Dimension | 5000x965x1750mm (3 meters conveyor) |
| Film Material | Heat Sealing compound film, OPP/PE, PT/PE, AL/PE, etc. |
| Total Weight | 1000kg |
| Motor Power | One packaging machine motor 1.1KW; one film motor 0.75KW |
| Electric Heating Power | 450Wx2/400Wx4 |
| Power Supply | Single Phase 220V, 50Hz |
| Total Power | 4.5kw |



Reciprocating Upper Paper Pillow Packing Machine

KING PACK

| | |
|-------------------------|-------------------|
| Model | BG-350W |
| Film Width (mm) | Max. 340 |
| Bag Length (mm) | 110-330 |
| Bag Width (mm) | 50-160 |
| Product Height (mm) | 80 |
| Film Roll Diameter (mm) | Max. 320 |
| Packing Speed (bag/min) | 40-80 |
| Power (V/Hz/kW) | 220 / 50/60 / 3.2 |
| Dimension (mm) | 3661x820x1410 |
| Weight (kg) | 600 |



Rotary Down Film Packing Machine

KING PACK

| Model | BG-250XB | BG-250XD | BG-350XB | BG-350XD |
|------------------------------|-------------------|----------|-------------------|----------|
| Film Width (mm) | Max. 240 | | Max. 340 | |
| Bag Length Single Knife (mm) | 65-190 | 90-220 | 65-190 | 90-220 |
| Bag Length Double Knife (mm) | 120-280 | 150-330 | 120-280 | 150-330 |
| Bag Width (mm) | 30-110 | 30-110 | 50-160 | 50-160 |
| Product Height (mm) | Max. 45 | Max. 60 | Max. 45 | Max. 60 |
| Film Roll Diameter (mm) | Max. 320 | | | |
| Packing Speed (bag/min) | 40-230 | | | |
| Power (V/Hz/kW) | 220 / 50/60 / 2.4 | | 220 / 50/60 / 2.6 | |
| Dimension (mm) | 3705x665x1375 | | 4005x765x1375 | |
| Weight (kg) | 500 | | 550 | |



Rotary Pillow Packing Machine



| | | |
|------------------------------|-------------------|----------|
| Model | BG-320B | BG-320D |
| Film Width (mm) | Max. 320 | Max. 320 |
| Bag Length Single Knife (mm) | 65-190 | 90-220 |
| Bag Length Double Knife (mm) | 120-280 | 150-330 |
| Bag Width (mm) | 50-145 | 50-145 |
| Product Height (mm) | Max. 45 | Max. 60 |
| Film Roll Diameter (mm) | Max. 320 | |
| Packing Speed (bag/min) | 40-230 | |
| Power (V/Hz/kW) | 220 / 50/60 / 2.4 | |
| Dimension (mm) | 3761x670x1412 | |
| Weight (kg) | 500 | |



Rotary Up-paper Pillow Packing Machine



| | |
|-------------------------|-------------------|
| Model | BG-450D |
| Film Width (mm) | Max. 440 |
| Bag Length (mm) | 120-450 |
| Bag Width (mm) | 80-200 |
| Product Height (mm) | Max. 80 |
| Film Roll Diameter (mm) | Max. 320 |
| Packing Speed (bag/min) | 40-100 |
| Power (V/Hz/kW) | 220 / 50/60 / 2.8 |
| Dimension (mm) | 4052x970x1412 |
| Weight (kg) | 650 |



Box Sealer



| | |
|----------------------------|-------------------------|
| Model | HF390 |
| Bagging Size Range (LxWxH) | 150-390x100-250x30-85mm |
| Packing Speed | 56bags/min |
| Mac Gift Box Length | 390mm |
| Power | 3.47Kw |
| Power Supply Type | 1ph, 220V 50Hz |
| Dimension | 2200x1000x1600mm |

Shrink Tunnel



BS-A series shrink tunnel adopts hot-wind & down-cyclone structure, intelligence temperature control and AC variable speed regulation. There are two optional conveyors, including Teflon belt type and roller type.

Features:

- Manual regulation of conveyor height
- Double adjustable air flap
- Single independent heating room
- Emergency off switch

Application:

1. BS-A series shrink tunnel is applied to heat shrinkable film such as PVC, POF, PP etc.
2. To shrink wrapping several products, such as food, beverage, cosmetics, presswork and toy etc.
3. To use in place where there is restrictin on space, such as small factory, monplization shop and laboratory etc.

Automatic Wrap Shrink Tunnel with Tray

| | | |
|--------------------------|----------------------------------|----------------------------------|
| Model | BS-4525A (R) | BS-4525A (S) |
| Voltage (V/Hz) | 220/50 380/50 (3PH) 220/60 (3PH) | 220/50 380/50 (3PH) 220/60 (3PH) |
| Power (Kw) | 6.5 | 6.5 |
| Loading (kg) | 10 | 10 |
| Speed (m/min) | 0-10 | 0-10 |
| Tunnel Size (LxWxH) (mm) | 900x450x(50-250) | 900x450x(50-250) |
| Dimension (mm) | 1200x650x1100 | 1200x650x1100 |
| Net Weight (kg) | 90 | 90 |
| Conveyor | Roller | Mesh |





FEATURES

- PVC, POF film available.
- Separate temperature controls for upper and lower chamber.
- Different conveyor roller type depends on varies applications.
- Roller conveyor
- Teflon net conveyor
- Mesh net conveyor
- Variable conveyor speed.
- Conveyor rollers with silicon sleeve tube for safety purpose.
- Double entry and exit curtains for consistent temperature
- Mini size design for space saving.

Mini Heat Shrink Tunnel

| Model | CN-4520A (R) | CN-4520A (S) |
|----------------|------------------|------------------|
| Power Supply | 1phase, 220/240V | 1phase, 220/240V |
| Power (Kw) | 6 | 6 |
| Conveyor Speed | 2-7m/min | 2-7m/min |
| Tunnel Size | 800x450x200mm | 800x450x200mm |
| Conveyor Size | 1200x450x690mm | 1200x450x690mm |
| Dimension (mm) | 1330x720x1100mm | 1330x720x1100mm |
| Conveyor | Roller | Mesh |



Automatic Label Shrink Tunnel Machine For Bottle Cap



| Model | SM-4525LX | SM-5030LX |
|-------------------|----------------------|----------------------|
| Machine Dimension | 1800x943x1255mm | 1800x9990x1300mm |
| Tunnel Dimension | 1500x450x250mm | 1500x500x300mm |
| Max. Packing Size | 700x300x200mm | 1300x400x250mm |
| Conveyor Speed | 0-20m/m | 0-20m/m |
| Net Weight | 450kg | 650kg |
| Power | 13Kw | 16Kw |
| Power Supply | 3Ph 220/380V 50/60Hz | 3Ph 220/380V 50/60Hz |



BS-1510G label shrink tunnel adopts hot air circulating shrinkage, shrinking for the body as well as the cap of bottles.

Features :

- Adopts imported parts and S/S heaters.
- The conveying speed is controlled by a step-less electronic speed controller.
- Only heat the cap of the bottle, ensures products quality inside the bottle.
- Adopt two blowing motors in low power, turbo air blowing ensure the label's position and without corrugation after shrank.
- Can meet all kinds of bottles just need to set and adjust the machine simply.
- Can heat only part of the tunnel for some special requirement of the products so that can save the energy.
- This item can be connected with the production line.

Automatic Label Shrink Tunnel Machine For Bottle Cap



| Model | BS-1510G |
|--------------------------|------------------|
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (Kw) | 4.5 |
| Packing Speed (pcs/hour) | 8000-12000 |
| Max. Packing Size (mm) | ø120x400 |
| Tunnel Size (mm) | 1000x150x100 |
| Film Used | PVC, POF |
| External Dimensions (mm) | 1530x400x1300 |
| Net Weight (kg) | 180 |



Description :

BS-2450S steam label shrink tunnel is a new generation of shrink tunnel, which is elaborate designed and attractive in appearance.

Features :

- Adopts steam as heat resource, fast; shrink smoothly without deformation.
- The inner box adopts Seamless steel pipe.
- The shell of machine is made up of stainless steel with double insulation.
- Energy-saving and complies with international safety standard.
- Stainless steel drain pan on the bottom collects condensate water, which is characterized with convenient operation and maintenance.

Application :

The machine is mainly used to shrink the labels of bottles, jars, cups, etc, no matter the label is located on the body, bottom or cap of the bottle. It is widely used in industries such as food staff, pharmacy and cosmetics to package the containers with labels like glass bottle, plastic bottle, paper cup, etc.

Steam Label Shrink Tunnel



| Model | BS-2450S |
|----------------------------------|------------------|
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (Kw) | 0.9 |
| Packing Speed (pcs/hour) | 3000-10000 |
| Max. Packing Height (mm) | 220 |
| Max. Packing Width (mm) | 100 |
| Steam Pressure (MPa) | 0.1 |
| Steam Consumption (Kg/H) | 24 |
| Shrink Labeling Temperature (°C) | 80-90 |
| External Dimensions (mm) | 2450x500x1600 |
| Net Weight (kg) | 120 |



Table Top Shrink Packaging Machine For PE Film



| Model | TB-390 | TB-540 |
|-------------------------|------------------------------|----------------------------|
| Voltage (Phase/Volt/Hz) | 1/220/50, 3/380/50, 3/220/60 | 3/380/50, 3/220/60 |
| Total Power (Kw) | 11 | 17 |
| Packaging Area (mm) | 390x540 | 540x780 |
| Packing Speed (pcs/h) | 40-50 | 40-50 |
| Package Material | PVC PE Skin Packaging Film | PVC PE Skin Packaging Film |
| Film Width (mm) | 450 | 610 |
| Dimension (mm) | 1515x605x1355 | 1890x760x1355 |
| Net Weight (kg) | 135 | 195 |

Vertical & Filling Machine



Automatic Tea Bag Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDC-125 |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1300 |
| Packing Capacity (ml) | 1.5-40 |
| Capacity (bags/min) | 35-70 |
| Length of Bag (mm) | 50-110 |
| Width of Bag (mm) | 30-80 |
| Thread Length (mm) | 160 |
| External Dimensions (mm) | 930x720x1850 |
| Net Weight (kg) | 280 |



Automatic Tea Bag Packaging Machine



| | |
|-------------------|-----------------------|
| Model | DXDC-18 |
| Bag Type | 3 side sealing |
| Feeding System | Volumetric cup filler |
| Package Range | 3-15ml |
| Inner Bag Size | L:50-70mm, W:40-80mm |
| Outer Bag Size | L:70-120mm, W:60-90mm |
| Tag Size | L:20-24mm, W:40-55mm |
| Leng of the Tread | 155mm |
| Power Supply | 220V, 50Hz, 3.7Kw |
| Packing Speed | 40-60bags/min |
| Weight | 500Kg |
| Dimension | 1250x700x1800mm |



Automatic Packaging Machine with Chain-Hopper



| | |
|--------------------------|------------------|
| Model | DXDD-40 II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1300 |
| Packing Capacity (ml) | 50-90 |
| Capacity (bags/min) | 5-40 |
| Length of Bag (mm) | 50-110 |
| Width of Bag (mm) | 30-80 |
| External Dimensions (mm) | 1140x600x1780 |
| Net Weight (kg) | 350 |



Automatic Packaging Machine with Chain-Hopper



| | |
|--------------------------|------------------|
| Model | DXDD-150 II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1700 |
| Packing Capacity (ml) | 35-70 |
| Capacity (bags/min) | 5-150 |
| Length of Bag (mm) | 80-150 |
| Width of Bag (mm) | 30-110 |
| External Dimensions (mm) | 1150x600x1780 |
| Net Weight (kg) | 400 |



Automatic Powder Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDF-20AX |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1300 |
| Packing Capacity (ml) | 2-20 |
| Capacity (bags/min) | 35-55 |
| Length of Bag (mm) | 35-110 |
| Width of Bag (mm) | 25-80 |
| External Dimensions (mm) | 1060x720x1800 |
| Net Weight (kg) | 330 |



Automatic Powder Packaging Machine with Upright Screw Blanking



| | |
|--------------------------|------------------|
| Model | DXDF-1000A |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 4300 |
| Packing Capacity (ml) | 200-1000 |
| Capacity (bags/min) | 5-30 |
| Length of Bag (mm) | 50-300 |
| Width of Bag (mm) | 50-220 |
| External Dimensions (mm) | 1370x870x2700 |
| Net Weight (kg) | 700 |



Automatic Pyramidal Shape Bag Powder Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDF-100ZAX |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 2000 |
| Packing Object | Powder |
| Packing Capacity (ml) | 10-100 |
| Capacity (bags/min) | 20-40 |
| Length of Bag (mm) | 50-80 |
| Width of Bag (mm) | 30-80 |
| External Dimensions (mm) | 1130x860x1950 |
| Net Weight (kg) | 375 |



Automatic Paste Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDG-20II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1700 |
| Packing Capacity (ml) | 5-20 |
| Capacity (bags/min) | 50-80 |
| Length of Bag (mm) | 50-110 |
| Width of Bag (mm) | 30-90 |
| External Dimensions (mm) | 790x600x1780 |
| Net Weight (kg) | 350 |



Automatic Paste Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDG-1000II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1950 |
| Packing Capacity (ml) | 100-1000 |
| Capacity (bags/min) | 25-60 |
| Length of Bag (mm) | 50-250 |
| Width of Bag (mm) | 50-220 |
| External Dimensions (mm) | 1120x920x2050 |
| Net Weight (kg) | 500 |



Automatic Pyramidal Shape Bag Paste Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDG-100ZII |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 2100 |
| Packing Object | Paste |
| Packing Capacity (ml) | 10-100 |
| Capacity (bags/min) | 30-70 |
| Length of Bag (mm) | 50-80 |
| Width of Bag (mm) | 30-80 |
| External Dimensions (mm) | 1100x950x1900 |
| Net Weight (kg) | 450 |



Automatic Granule Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDK-2000II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1950 |
| Packing Capacity (ml) | 50-2000 |
| Capacity (bags/min) | 15-35 |
| Length of Bag (mm) | 50-300 |
| Width of Bag (mm) | 50-220 |
| External Dimensions (mm) | 1150x860x2070 |
| Net Weight (kg) | 350 |



Automatic Granule Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDK-40II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1700 |
| Packing Capacity (ml) | 5-40 |
| Capacity (bags/min) | 50-80 |
| Length of Bag (mm) | 50-110 |
| Width of Bag (mm) | 30-80 |
| External Dimensions (mm) | 790x600x1780 |
| Net Weight (kg) | 350 |



Automatic M Shape Folding Granule Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDK-500MII |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1750 |
| Capacity (bags/min) | 30-70 |
| Packing Object | Granule |
| Packing Capacity (ml) | 50-500 |
| Length of Bag (mm) | 50-220 |
| Width of Bag (mm) | 30-150 |
| External Dimensions (mm) | 1120x900x1950 |
| Weight (kg) | 400 |



Automatic Liquid Packaging Machine



| | |
|--------------------------|---------------------|
| Model | DXDY-1000AII |
| Voltage (V/Hz) | AC 220/50 or 380/50 |
| Power (W) | 1200 |
| Packing Capacity (ml) | 200-500 |
| Capacity (bags/min) | 1500-2100 |
| Film Width (mm) | 240/320 |
| Size of Bag (mm) | (50-170)x(50-150) |
| Film | Single PE Film |
| External Dimensions (mm) | 850x750x1600 |
| Net Weight (kg) | 350 |



Automatic Liquid Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDY-20BNII |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1700 |
| Packing Capacity (ml) | 5-20 |
| Capacity (bags/min) | 50-200 |
| Length of Bag (mm) | 50-110 |
| Width of Bag (mm) | 30-80 |
| External Dimensions (mm) | 790x600x1780 |
| Net Weight (kg) | 350 |



Automatic Tablet Packaging Machine



| | |
|--------------------------|------------------|
| Model | DXDP-20II |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 1300 |
| Packing Capacity (ml) | 0.5-20 |
| Capacity (bags/min) | 18-100 |
| Length of Bag (mm) | 35-85 |
| Width of Bag (mm) | 25-70 |
| External Dimensions (mm) | 930x720x1870 |
| Net Weight (kg) | 350 |

Vertical & Filling Machine



HUALIAN
MACHINERY

Automatic Vertical Form and Seal Machine

| | |
|---------------------------|--|
| Model | HLNV-420 |
| Power (Kw/V/Hz) | 2.8/220 / 50/60 |
| Bag Length (mm) | 80-280 |
| Bag Width (mm) | 80-132 |
| Film Roll Diameter (mm) | 320 (maximum) |
| Packaging Speed | 10-40bag/min. (according to the product conditions) |
| Range of Measurement (ml) | 150-1500 |
| External Dimensions (mm) | 1390x1155x1800 |



HUALIAN
MACHINERY

Automatic Screw Feeding Machine

| | |
|--------------------------|---------------------|
| Model | ZS-P3 |
| Voltage (V/Hz/Phase) | AC 380/50 220/60 /3 |
| Power (kw) | 1.9 |
| Capacity (m3/h) | 2.2 |
| External Dimensions (mm) | 3060x760x820 |
| Net Weight (kg) | 250 |



Soontrue
To be ahead.

Liquid Packing Machine

| | |
|----------------------------|-------------------|
| Model | ZL-230 |
| Bag Size (mm) | L.80-300xW.80-200 |
| Suitable Film Width (mm) | 130-320 |
| Packing Speed (bags/min) | 15-70 |
| Packing Film | Laminated Film |
| Electrical (Kw/Volt/Hz/Ph) | 4.0/200/50/1 |
| Machine Noise (dB) | ≤75 |
| External Dimensions (mm) | 1770x1105x1500 |
| Weight (Kg) | 650 |



Filling Sealing Machine

KING PACK

| | |
|------------------------|-----------------|
| Model | DF-130J |
| Voltage (V/Hz) | 110/220 / 50-60 |
| Power (Kw) | 0.9 |
| Film Max Diameter (mm) | 200 |
| Max Width (mm) | 65 |
| Dimensions (mm) | 570x360x710 |
| Weight (kg) | 35 |



Automatic Four Heads Liquid Filling Machine

KING PACK

| | |
|-------------------------|------------------|
| Model | HZGY1000-4D |
| Voltage | AC220V 50-60Hz |
| Power | 400W |
| Air Pressure | 0.6-0.8Mpa |
| Filling Speed | 1000-1200bph |
| Filling Accuracy | ±1% |
| Conveyor Length | 2m |
| Machine Size | 2000x1050x1650mm |
| Required Air Compressor | ≥7.5kw 200L |



Automatic Four Heads Paste Filling Machine

KING PACK

| | |
|-------------------------|------------------|
| Model | HZGG1000-4D |
| Voltage | AC220V 50-60Hz |
| Power | 400W |
| Air Pressure | 0.6-0.8Mpa |
| Filling Speed | 1000-1200bph |
| Filling Accuracy | ±1% |
| Conveyor Length | 2m |
| Hopper Size | 900x500x400/135L |
| Machine Size | 2000x1050x1650mm |
| Required Air Compressor | ≥7.5kw 200L |



HZGG1000-8D



HZGY1000-8D



HZGY1000-8D

Auto Filling Machine


KING PACK

| | |
|-------------------------|-------------------|
| Voltage | AC220V 50-60Hz |
| Air Pressure | 0.6-0.8Mpa |
| Filling Speed | 2500-3000bph |
| Filling Accuracy | ±0.5% |
| Conveyor Length | 4m |
| Hopper Size | 900x500x1620/245L |
| Machine Size | 4000x1100x1950mm |
| Required Air Compressor | ≥7.5kw 200L |

Vertical & Filling Machine



G1WYD100-5000
Horizontal Single Head Liquid Filling Machine

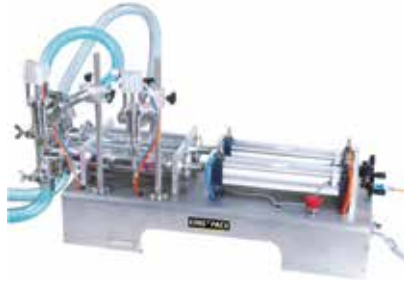

G2WYD100-5000
Horizontal Double Head Liquid Filling Machine



G1WGD100-5000
Horizontal Single Head Paste Filling Machine



G2WGD100-5000
Horizontal Double Head Paste Filling Machine



G1WGD100-5000
Horizontal Single Head Paste Filling Machine With Mixing Heating Tank



G1WGD100-5000
Horizontal Single Head Paste Filling Machine With Luxury type Heating Tank

Horizontal Filling Machine



| Model | G1WYD | G2WYD | G1WGD | G2WGD |
|-------------------------|---|-------------------------------------|-------------------------------------|-------------------------------------|
| Voltage | AC220/110V 50-60Hz | AC220/110V 50-60Hz | AC220/110V 50-60Hz | AC220/110V 50-60Hz |
| Power | 20W | 40W | 20W | 40W |
| Air Pressure | 0.4-0.6MPa | 0.4-0.6MPa | 0.4-0.6MPa | 0.4-0.6MPa |
| Filling Speed | 5-20bpm (depends on filling volume) | 8-38bpm (depends on filling volume) | 4-18bpm (depends on filling volume) | 7-36bpm (depends on filling volume) |
| Filling Accuracy | ±1% | ±1% | ±1% | ±1% |
| Optional Filling Volume | 10-100ml, 30-300ml, 50-500ml, 100-1000ml, 200-1500ml, 300-2500ml, 1000-5000ml | | | |
| Required Air Compressor | ≥1.5kw 65L | ≥3kw 100L | ≥1.5kw 65L | ≥3kw 100L |



Pneumatic Filling Machine



| | |
|------------------------|--------------------------|
| Model | A02 |
| Voltage | AC220V |
| Filling Arrange | 0-50ml |
| Filling Speed | 20-30times/min |
| Filling Accuracy | ±1% |
| Filling Mouth Diameter | outside Ø8mm/inside Ø7mm |
| Hopper Capacity | 10kg |
| Machine Size | 270x270x700mm |
| Weight | 10Kg |



Hand Pressure Filling Machine



| | |
|------------------------|--------------------------|
| Model | A03 |
| Voltage | AC220V |
| Filling Arrange | 0-50ml |
| Filling Speed | 20-30times/min |
| Filling Accuracy | ±1% |
| Filling Mouth Diameter | outside Ø8mm/inside Ø7mm |
| Hopper Capacity | 10kg |
| Machine Size | 270x270x700mm |
| Weight | 10Kg |

Vertical & Filling Machine



Digital Liquid Filling Machine KING PACK

| | |
|---------------------|-----------------|
| Model | HZK-160 |
| Package Type | Bottle/cup/tank |
| Material Type | Liquid |
| Power | 0.3kW |
| Filling Heads | 1 |
| Diameter of Bottle | 10-500mm |
| Diameter of Bottle | ≥10mm |
| Filling Speed | 2000ml/min |
| Filling Accuracy | 1% |
| Degree of Automatic | Semi-automatic |
| Machine Size | 308x255x140mm |



Single-head Peristaltic Pump Filling Machine KING PACK

| | |
|---------------------|-----------------|
| Model | HZK-200 |
| Package Type | Bottle/cup/tank |
| Material Type | Liquid/paste |
| Power | 0.1kW |
| Filling Heads | 1 |
| Diameter of Bottle | 10-500mm |
| Diameter of Bottle | ≥6mm |
| Filling Speed | 3000ml/min |
| Filling Accuracy | 0.5% |
| Degree of Automatic | Semi-automatic |
| Machine Size | 240x300x220mm |



Semi-auto Tinplate Can Seamer KING PACK

| | |
|------------------------|----------------|
| Model | TCS-160 |
| Voltage | AC220V 50-60Hz |
| Power | 0.37kW |
| Suitable Cap Diameter | 45-110mm |
| Suitable Bottle Height | 39-200mm |
| Capping Speed | 15-20bots/min |
| Machine Size | 550x300x680mm |
| Weight | 55kg |

Description :

This machine is a high technical equipment and integrating GMP requirement, with features of rational structure. Complete function, easy operation, accurate filling, stable running, as well as low noise. It adopt with PLC controller to automatically operating, from liquid or paste material filling to batch number printing (include manufacture date) it is an ideal equipment for ALU tube. Plastic tube and multiple tube filling and sealing in cosmetic, pharmacy, foodstuff, adhesive, etc industries. And this machine is in confortmite with standard of GMP.



Auto Plastic Tube Filling and Sealing Machine KING PACK

| | |
|-------------------------|-----------------------------|
| Model | HZNF-60A |
| Motor Power | 2Kw (380V/220V 50-60Hz) |
| Sealing Power | 3Kw |
| Tube Material | Plastic Tube/Composite Tube |
| Tube Diameter | Ø10-50mm |
| Tube Length | 60-220mm |
| Filling Volume | 5-100ml/50-200ml/100-250ml |
| Filling Accuracy | ±1% |
| Speed | 30-60pcs/min |
| Air Pressure | 0.55-0.65Mpa 0.1m³/min |
| Machine Size | 2620x1020x1980mm |
| Weight | 1000Kg |
| Required Air Compressor | ≥7.5kw 200L |



Auto Aluminum Tube Filling and Folding Machine KING PACK

| | |
|-------------------------|----------------------------|
| Model | HZNF-60A |
| Motor Power | 1.5Kw (380V/220V 50-60Hz) |
| Tube Material | Metal Tube/Aluminum Tube |
| Tube Diameter | Ø10-30mm |
| Tube Length | 60-220mm |
| Filling Volume | 5-100ml/50-200ml/100-250ml |
| Filling Accuracy | ±1% |
| Speed | 30-40pcs/min |
| Air Pressure | 0.55-0.65Mpa 0.1m³/min |
| Machine Size | 2620x1020x1980mm |
| Weight | 1000Kg |
| Required Air Compressor | ≥7.5kw 200L |

Vertical & Filling Machine



Cup Output.



Coding.



Cup Station.



Filling Head.



Aluminum Plate.



Control Panel.



Description :

the automatic rotary cup filling and sealing machine performs the cup dispensing process automatically, filling, sealing of foil and exit of the finished product. The machine adopts stainless steel, aluminum alloy. Copper and other anti-corrosion materials in line with food hygiene law, with multiple functions, compact structure, high degree of automation, easy operation and maintenance, high production efficiency. It is capable of achieving to fill and seal cups and boxes with different shapes. (Filling product, such as various liquids, semi-fluids, pastes, sauces, granules or powder, etc.) Also it can realize different packaging requirements.

Turntable Cup Fill Machine (Roll Film)



| | |
|--------------------|------------------|
| Model | HZNF-60A |
| Voltage | 220V/50Hz |
| Power | 1.7kw |
| Air Pressure | 0.5-0.7Mpa |
| Production Speed | 600-800pcs/h |
| Filling Accuracy | ±1% |
| Heat Sealing Power | 0-400°C |
| Sealing Material | PP, PE, PET |
| Machine Size | 1000x1000x1500mm |
| Weight | 350Kg |



GJV-20
(2 Bottles)

GJV-40
(4 Bottles)

Glass Jar Vacuum Capping Machine



| | | |
|-------------------------|----------------|----------------|
| Model | GJV-20 | GJV-40 |
| Voltage | AC220V/50-60Hz | AC220V/50-60Hz |
| Power | 0.55Kw | 0.55Kw |
| Air Pressure | 0.4-0.6Mpa | 0.4-0.6Mpa |
| Suitable Cap Diameter | 45-80mm | 38-68mm |
| Suitable Bottle Height | 60-120mm | 60-120mm |
| Capping Speed | 15-20bots/min | 30-60bots/min |
| Required Air Compressor | ≥1.5kw 65L | ≥1.5kw 65L |
| Machine Size | 550x480x780mm | 750x700x1300mm |
| Weight | 80Kg | 200Kg |

Sealing & Cutting Machine



Automatic Shrink Packaging Machine For Food



| | |
|----------------------------------|-----------------------------|
| Model | BSF-4030 |
| Voltage (V/Hz) | AC 220/50 |
| Power (Kw) | 3.8 |
| Packing Speed (pcs/h) | 500-800 |
| Max. Packing Size (mm) | W+H<400, W<280, L<350, H<80 |
| Max. Sealing & Cutting Size (mm) | 400x300 |
| External Dimensions (mm) | 1215x590x1020 |
| Net Weight (kg) | 100 |



L-Seal Semi Automatic Box Cutting Machine



| | |
|----------------------------------|----------------|
| Model | BSL-5045L |
| Voltage (V/Hz) | AC 220/50 |
| Power (Kw) | 1.2 |
| Capacity (pcs/h) | 800-1200 |
| Max. Packing Size (mm) | W+H<450, W<400 |
| Max. Sealing & Cutting Size (mm) | 500x450 |
| External Dimensions (mm) | 1560x757x1040 |
| Net Weight (kg) | 125 |



Chamber Shrink Packing without Conveyor



| | |
|----------------------------------|-----------------|
| Model | FM-4030 |
| Voltage (Phase/V/Hz) | 1 / 220 / 50/60 |
| Power (Kw) | 3.8 |
| Capacity (pcs/h) | 500-800 |
| Max. Packing Size L+H (mm) H<150 | <350 |
| Max. Packing Size W+H (mm) H<150 | <250 |
| Max. Sealing Size (mm) | 400x300 |
| Dimensions (mm) | 1022x568x1005 |
| Net Weight (kg) | 115 |
| Applicable Film | POF/PVC |



Pneumatic Combo L-Bar Sealer and Shrink Packager



| | |
|-------------------------------------|-------------------------|
| Model | FL-5545TB+SM-4525-C-28" |
| Machine Dimensions (mm) | 2529x724x1612 |
| Max Packing Size (mm) L+H(mm) H<200 | ≤500 |
| Max Packing Size (mm) W+H(mm) H<200 | ≤400 |
| Max Sealing Size (mm) | 550x450 |
| Capacity (pcs/h) | 800~1200 |
| Net Weight (kg) | 420 |
| Power (kw) | 11 |
| Power Source | 3PH 220V/380V 50/60Hz |
| Air Source (kg/cm ²) | 6-8 |
| Applicable Film | POF/PVC |



Pneumatic L Bar Sealer Packing Machine



| | |
|------------------------------------|-----------------------|
| Model | FL-5545TB |
| Machine Dimensions (mm) | 1569x710x1060 |
| Max packing size L+H(mm) H<200 | ≤500 |
| Max Packing Size W+H(mm) H<200 | ≤400 |
| Max Sealing Size (mm) | 550x400 |
| Packing speed(pcs/h) | 800-1200 |
| Conveyor speed(m/min) | 800-1200 |
| Net Weight (kg) | 200 |
| Power (kw) | 1.2 |
| Power Supply | 1PH 110V/220V 50/60Hz |
| Air Pressure (kg/cm ²) | 6-8 |
| Applicable Film | POF/PVC |



Hi Speed Intermittent Side Sealer



| | |
|----------------------------------|------------------|
| Model | FL-5545TBH |
| Machine Dimensions (mm) | 2100x1480x1308 |
| Max Packing Size L(mm) | Length Unlimited |
| Max Packing Size W+H(mm) | ≤400 |
| Cross Sealing Size L/H(mm) | 520/150 |
| Capacity (pcs/m) | 20-65 |
| N.W. (kg) | 800 |
| Power (kw) | 3 |
| Power Source | 1PH 220V 50/60Hz |
| Air Source (kg/cm ²) | 6-8 |
| Applicable Film | POF/PE |



Heat Automatic Side Sealing Machine For Boxes



| | |
|--------------------------------------|---------------------------|
| Model | BSF-5545LE |
| Voltage (Phase/V/Hz) | 1/220/50 |
| Compressed Air (kg/cm ³) | 5-8 |
| Power (kw) | 1.6 |
| Capacity (pcs/min) | 0-30 |
| Max. Packing Size (W+H) (mm) | W+H≤450, Length unlimited |
| Max. Packing Height (mm) | 150 |
| Sealing Length (mm) | 52 |
| External Dimensions (mm) | 1930x1000x1600 |
| Net Weight (kg) | 500 |

Sealing & Cutting Machine



Vertical L-bar Sealing & Shrinking Packing Machines



| Model | FL-4535TBD | SM-5030LX |
|--------------------------------|------------------|----------------------|
| Machine Dimensions (mm) | 1520x1180x1170 | 1872x1035x1305 |
| Tunnel Chamber (mm) | / | 1500x500x300 |
| Max Packing Size L+H(mm) H<180 | ≤400 | 1300x400x250 |
| Max Packing Size W+H(mm) H<180 | ≤300 | / |
| Sealing Size LxW(mm) | 450x350 | / |
| Capacity(pcs/m) | 15-25 | 0-20m/min |
| N.W.(kg) | 600 | 650 |
| Power(kw) | 2.5 | 16 |
| Power Source | 1PH 220V 50/60Hz | 3PH 220/380V 50/60Hz |
| Air Source(kg/cm2) | 6-8 | / |
| Applicable Film | POF/PE | POF |



Full-auto L-bar Sealing & Shrinking Packing Machines



| Model | FL-5545TBA/TBB | SM-4525 |
|--------------------------------|------------------|----------------------|
| Machine Dimensions (mm) | 1700x840x1525 | 1300x746x1465 |
| Max Packing Size L+H(mm) H<130 | ≤500 | 700x350x200 |
| Max Packing Size W+H(mm) H<130 | ≤430 | / |
| Sealing Size LxW(mm) | 550x450 | / |
| Capacity(pcs/m) | 15-25 | 0-15m/min |
| N.W.(kg) | 225 | 260 |
| Power(kw) | 2.2 | 9 |
| Power Source | 1PH 220V 50/60Hz | 3PH 220/380V 50/60Hz |
| Air Source(kg/cm2) | 6-8 | / |
| Applicable Film | POF/PE | POF |



Automatic Vacuum Shrinking Packaging Machine



| Model | BSF-5640LG | BS-5030X |
|----------------------------------|------------------------------|----------------------|
| Voltage (Phase/V/Hz) | 220/50/60Hz | 3/380/50 or 3/220/60 |
| Power (kw) | 1.8 | 16 |
| Compressed Air (kg/cm²) | 5-8 | |
| Capacity/Speed | 0-25pcs/min | 0-25m/min |
| Max. Packing Size (mm) | W+H<450, W<400, H<120, L<350 | W.400xH.250 |
| Max. Sealing & Cutting Size (mm) | 500x400 | |
| External Dimensions (mm) | 1770x830x1600 | 1800x990x1300 |
| Net Weight (kg) | 300 | 300 |
| Tunnel Size (mm) | | 1500x500x300 |



Heat Shrink Packaging Machine With Tunnel For Flooring Boards



| Model | BSF-5545LE | BS-4525 |
|--------------------------|---------------------------|----------------------|
| Voltage (Phase/V/Hz) | 1/220/50 | 3/380/50 or 3/220/60 |
| Power (Kw) | 1.6 | 10 |
| Compressed Air (kg/cm²) | 5-8 | |
| Capacity/Speed | 20-40pcs/min | 0-10m/min |
| Max. Packing Size (mm) | W+H<450, Length Unlimited | 700x400x200 |
| Max. Packing Height (mm) | 150 | |
| Sealing Length (mm) | 520 | |
| External Dimensions (mm) | 1930x1000x1600 | 1370x715x1455 |
| Net Weight (kg) | 500 | 185 |
| Loading (kg) | | 10 |
| Tunnel Size (mm) | | 1000x450x250 |



Shrink Heat Sealing Machine For Bottle



| Model | BSF-6030X | BS-5540M |
|-----------------------------|---------------|----------------------|
| Voltage (Phase/V/Hz) | 3/380/50 | 3/380/50 or 3/220/60 |
| Power (Kw) | 1.5 | 23 |
| Compressed Air (KW) | 6 | |
| Speed | 0-12trays/min | 0-8m/min |
| Infeed Conveyor Height (mm) | 850±50 | |
| Max. Sealing Length (mm) | 600 | |
| External Dimensions (mm) | 1370x920x1800 | 2550x850x1600 |
| Net Weight (kg) | 380 | 300 |
| Loading (kg) | | 40 |
| Tunnel Size (mm) | | 1450x550x400 |
| Film Used | PVC, PE | |

Sealing & Cutting Machine



Thermal Heat Automatic Sealing Machine

| Model | BSF-6030XI | BS-6040L |
|---|----------------|----------------------|
| Voltage (Phase/V/Hz) | 3/380/50 | 3/380/50 or 3/220/60 |
| Power (Kw) | 2 | 22 |
| Air Pressure Required (kg/cm ²) | 7 | |
| Speed | 0-12trays/min | 12m/min |
| Max. Packing Size (mm) | 500x300x330 | W450xH350 |
| Sealing & Cutting Size (mm) | 700x330 | |
| Infeed Conveyor Height (mm) | 850±50 | 850±50 |
| External Dimensions (mm) | 1360x2120x1900 | 4000x900x1700 |
| Net Weight (kg) | 465 | 560 |
| Loading (kg) | | 40 |
| Tunnel Size (mm) | | 1800x600x400 |
| Film Used | PE, PVC | |



Semi-auto Sleeve Wrapping & Shrinking Packing Machines

| Model | ST-6030 | SM-6040S |
|---------------------------------|----------------------|----------------------|
| Machine Dimensions(mm) | 1206x1274x2051 | 2404x980x1690 |
| Tunnel Chamber Size(mm) | / | 1500x600x400 |
| Max Packing Size(mm) | 500x300x300 | 1300x400x300 |
| Sealing Blade Size L(mm) | 700 | / |
| Temperature Range (°C) | 0-200 | 0-400 |
| Working Table Height(mm) | 850±50 | 850±50 |
| Capacity(pcs/m) | 5-8 | 15-20 |
| N.W.(kg) | 300 | 500/550 |
| Power(kw) | 1.3 | 20 |
| Power Source | 3PH 220/380V 50/60Hz | 3PH 220/380V 50/60Hz |
| Air Source(kg/cm ²) | 6-8 | / |
| Applicable Film | PE | PE |



Full-auto Sleeve Wrapping & Shrinking Packing Machines

| Model | ST-6030AH | SM-6040M |
|---------------------------------|----------------------|----------------------|
| Machine Dimensions(mm) | 1695x2730x2039 | 2804x980x1687 |
| Tunnel Chamber Size(mm) | / | 1800x600x400 |
| Max Packing Size(mm) | 400x300x300 | 1300x400x300 |
| Sealing Blade Size L(mm) | 700 | / |
| Temperature Range (°C) | 0-200 | 0-400 |
| Working Table Height(mm) | 850±50 | 850±50 |
| Capacity(pcs/m) | 6-14 | 25-30 |
| N.W.(kg) | 490 | 600 |
| Power(kw) | 1.5 | 25 |
| Power Source | 3PH 220/380V 50/60Hz | 3PH 220/380V 50/60Hz |
| Air Source(kg/cm ²) | 6-8 | / |
| Applicable Film | PE | PE |

Labelling Machine



Features:

1. Labeling speed is up to 30 times/minute.
2. Labeling bottle size and labeling height is adjustable to meet the different labeling needs.
3. Excellent effect can be delivered for labels with no wrinkles and no bubbles.
4. Manual type is easy using, small size is easy carrying, Simple operation.
5. Modular design, convenient maintenance and low repair cost.



Manual Round Bottle Labeling Machine

| Model | MT-30 |
|-------------------------------|------------------|
| Labeling Speed | 10-30pcs/min |
| Accuracy | ±0.5mm |
| Min.Label Roll Inner Diameter | ≥75mm |
| Max.Label Roll Out Diameter | ≤Ø150mm |
| Bottle Diameter | 15-120mm,H 150mm |
| Label Width | 10-100mm |
| Label Length | 10-300mm |
| Machine Size | 400x240x210mm |
| Machine Weight | 4.5kg |

Labelling Machine



MT-50C With Coding

Semi-automatic Round Bottle Labeling Machine **KING PACK**

| | |
|--------------------------------|-------------------------|
| Model | MT-50/MT-50C |
| Voltage | 220V 50/60HZ |
| Power | 40W |
| Speed | 25-50 times/min |
| Accuracy | ±0.5mm |
| Label Size | W: 20-150mm L: 30-290mm |
| Min. Label Roll Inner Diameter | ≥75mm |
| Max. Label Roll Out Diameter | Ø260mm |
| Bottle Diameter | Ø15-150mm |
| Machine Size | 670x515x288mm |
| Machine Weight | 25kg |

Coding part : 1.Copper character size: 2x3x15mm
2.Ribbon size: 30mmx50m



Tabletop Flat Labeling Machine **KING PACK**

| | |
|---------------------|-------------------------|
| Model | TFLM-120 |
| Voltage | AC220V/60HZ |
| Power | 765W |
| Speed | 10-40 pcs/min |
| Product Size | 5-100mm |
| Label Height | 30-100mm |
| Label Length | 30-200mm |
| Label Roll Diameter | inner75-out 260 mm |
| Labeling Precision | ±1mm(depend on product) |
| Machine Weight | 150kg |
| Machine Size | 1200x700x800mm |
| Printing | NO |



Tabletop Round Bottle Labeling Machine Linear Type **KING PACK**

| | |
|---------------------|------------------------|
| Model | TRLM-120A |
| Voltage | AC220V/60Hz |
| Power | 400W |
| Speed | 10-40 pcs/min |
| Bottle Diameter | 30-80mm |
| Max. Label Height | 30-100mm |
| Max. Label Length | 30-160mm |
| Label Roll Diameter | inner 75- out 260 mm |
| Labeling Precision | ±1mm(depend on bottle) |
| Machine Weight | 150kg |
| Machine Size | 1200x980x680mm |
| Printing | No |



Tabletop Round Bottle Labeling Machine Holder type **KING PACK**

| | |
|---------------------|------------------------|
| Model | TRLM-120B |
| Voltage | AC220V/60Hz |
| Power | 400W |
| Speed | 10-25 pcs/min |
| Bottle Diameter | 30-80mm |
| Max. Label Height | 30-100mm |
| Max. Label Length | 30-200mm |
| Label Roll Diameter | inner75-out 260 mm |
| Labeling Precision | ±1mm(depend on bottle) |
| Machine Weight | 150kg |
| Machine Size | 2000x800x1350mm |
| Printing | NO |



Auto Flat Labeling Machine **KING PACK**

| | |
|-----------------------|-------------------------|
| Model | AFLM-200 |
| Voltage | AC220V/60Hz |
| Power | 1.25kW |
| Driving Motor | Servo Motor |
| Operation | Left to Right |
| Labeling Speed | 50-70pcs/min |
| Labeling Size | L: 30-100mm W: 30-100mm |
| Product Height | 5-100mm |
| Labeling Accuracy | ±1mm |
| Max. Label Roll Out | Ø260mm |
| Min. Label Roll Inner | Ø75mm |
| Machine Size | 2000x620x1600mm |



Auto Round Bottle Labeling Machine (Linear Type) **KING PACK**

| | |
|-----------------------|---------------------------|
| Model | ARLM-200A |
| Voltage | 110V/220V/50-60Hz |
| Power | 55W |
| Driving Motor | Step Motor |
| Operation | Left to Right |
| Labeling Speed | 10-40pcs/min |
| Labeling Size | L: 30-200mm W: 20-150mm |
| Bottle Diameter | Ø30-100mm |
| Labeling Accuracy | ±1mm (Depends on Product) |
| Max. Label Roll Out | Ø260mm |
| Min. Label Roll Inner | Ø75mm |
| Machine Size | 2000x800x1350mm |
| Machine Weight | 150kg |

Coding & Folding Machine



Ink Wheel Coding Machine

| | |
|--------------------------|--|
| Model | DK-1100 |
| Printing Speed | ≤300 times/min |
| Character Size | T-shaped letter 1.5 mm, 2.0 mm, 2.5 mm, 3.0mm (character width) X 3.5mm (character height) R-shaped letter 3.5mm (character width) X 3.5mm, 4.5mm, 5.5mm (character height) |
| Printing Lines | T-shaped characters (arranged axially) have a maximum of 13 lines, each line has a maximum of 20 characters |
| Print Spacing | ≥38mm (four sets of character wheels) ≥75mm (two sets of character wheels) |
| Ink Wheel Specifications | Φ36*32 mm (standard configuration) Φ36*40 mm (maximum length) |
| Power Supply | AC220V±10V, 50/60Hz |
| Power | 130W, 2A fuse |
| Weight | Print head 2kg Control box 1kg |
| Printing Method | Using solid ink wheel, automatic printing |



Coding & Folding Machine



Lock-And-Follow Solid-Ink Coding Machine

| | | | |
|--|---|-----|-----|
| Model | MY-812A | | |
| Voltage(V/Hz) | AC 220/50 110/60 | | |
| Power(W) | 150 | | |
| Max. Printing Speed (Pcs/min) | 300 | | |
| Max. Printing Line | T type(10.5PT):11 lines (Max. 10 characters/line) R type(10.5PT):8 lines (Max. 11 characters/line) | | |
| 180°printing wheel | T type(10.5PT):7 lines (Max. 10 characters/line) | | |
| 120°printing wheel | R type(10.5PT):8 lines (Max. 7 characters/line) | | |
| 90°printing wheel | T type(10.5PT):4 lines (Max. 10 characters/line) R type(10.5PT):8 lines (Max. 4 characters/line) | | |
| Size of Character(height)(mm) | 2x1.5(8PT) 2.5x2(9PT) 3x3(10.5PT) | | |
| Size of Solid-ink Roller (mm) | φ35x32 | | |
| Frame width(mm) | 400 | 500 | 600 |
| Max. film width(mm) | 280 | 380 | 480 |
| Max. Horizontal adjusting size for printer | 170 | 270 | 370 |
| Net weight(kg) | 11 | 12 | 13 |



Lock-And-Follow Color Ribbon Printing Machine

| | | | |
|--|--|-----|-----|
| Model | HP-241G | | |
| Voltage(V/Hz) | AC 220/50 110/60 | | |
| Power(W) | 150 | | |
| Max. Printing Speed (Pcs/min) | 200 | | |
| Max. Printing Line | 2x3characters : 3lines (Max. 12 characters/line,6lines is available to be customized) | | |
| Size of Character(height)(mm) | 3.0 | | |
| Size of Color Ribbon (mm) | 25, 30, 35 (width) | | |
| Frame width(mm) | 400 | 500 | 600 |
| Max. Film width(mm) | 350 | 450 | 550 |
| Max. Horizontal adjusting size for printer | 220 | 320 | 420 |
| Net weight (kg) | 7 | 7.3 | 7.6 |



Solid-Ink Coding Machine

| | |
|--------------------------|---|
| Model | MY-380F/W |
| Voltage (V/Hz) | AC 220/50 110/60 |
| Power (W) | 180 |
| Solid Ink Roller (mm) | 35x32 |
| Printing Speed (pcs/min) | ≤300 |
| Object Size (mm) | L : 50-500 W : 30-300 |
| Max. Printing Line | T type (10.5PT):11 lines (Max. 10 characters/line) R type (10.5PT):8 lines (Max. 11 characters/line) |
| Printing Size (mm) | Single side 60-250 |
| Type Size (mm) | 2.5x1.5(8PT) 2x2.5(9PT) 3x2(10.5PT) 5x2.2(18PT) |
| External Dimension (mm) | 440x465x260 |
| Net Weight (kg) | 23 |



Color Ribbon Hot Printing Machine

| | |
|-------------------------------|--|
| Model | HP-280P |
| Voltage(V/Hz) | AC 220/50 110/60 |
| Power(W) | 150 |
| Max. Printing Speed (Pcs/min) | 0-100 |
| Max. Printing Line | 2x4 size: 3 lines, Max. 12 characters/line (Can customized to be 5 lines) |
| Letter size(height)(mm) | 4 |
| Size of Color Ribbon(mm) | 25 30 35 |
| Net weight(kg) | 10 |



Color Ribbon Hot Printing Machine

| | |
|--------------------------------|--|
| Model | DY-8 |
| Voltage(V/Hz) | AC 220/50 110/60 |
| Power(W) | 50 |
| Max. Printing line | 2x4 characters 3lines(Max. 12 characters/line, 5 lines is available to be customized) |
| Size of Color Ribbon (mm) | 25 30 35(width) |
| External Dimensions(LxWxH)(mm) | 270x160x220 |
| Net weight(kg) | 2 |



Automatic Paper Folding Machine

| | | |
|---------------------------------|------------------|------------------|
| Model | ZE-8B/4 | ZE-9B/4 |
| Voltage (V/Hz) | AC 220/50 110/60 | AC 220/50 110/60 |
| Power (W) | 80 | 80 |
| Folding Tray Number | 4 | 4 |
| Max. Paper Size (mm) | 315x1225 | 215x1150 |
| Min. Paper Size (mm) | 50x70 | 50x70 |
| Max. Paper Thickness(g) | 125 | 125 |
| Min. Paper Thickness (g) | 40 | 40 |
| Max. Speed (m/min) | 80 | 80 |
| External Dimensions(LxWxH) (mm) | 1080x530x580 | 1020x430x580 |
| Net Weight (kg) | 48 | 38 |





Automatic Inkjet Printer Machine

KING PACK

| | |
|---------------------|---|
| Model | TP1 |
| Print Head | Thermal Inkjet 2.5 |
| Print Height | 1-25.4mm |
| Print Resolution | 300dpi Maximum |
| Interface | USB, RS232, Encoder, Photocell, Alarm Light |
| Adapter | AC input 100-240V, DC output 16.8V/2A |
| CPU | Quad Core 1.4GHz |
| Print Distance | Best Quality with 2-5mm |
| Weight | Controller 1kg, Printhead 0.25kg |
| Material of Printer | Aluminium Alloy |
| Operation System | Linux |
| Ink Type | Solvent Base 55ml, Waterbase 55ml |
| Ink Color | Black, White, Red, Blue, Yellow, Green, Invisible, UV |
| Print Content | Texttime, Symbol, QR Code, Bar Code, DM Code, Image, Counting Number, Variable Data |
| Print Materials | Plastic, Carton, Stone, Pipe, Cable, Metal, Electronic, Wood, Glass, Automotive Parts |
| Language | Chinese, English, Turkish, Arabic, Korean, Spanish, Russian, Portuguese, Italian |
| Dimension | Controller 185x115x42mm, Printhead 90x110x107mm |

Handheld Inkjet Printer

KING PACK



| | |
|---------------------|---|
| Model | T10 |
| Print Head | Thermal Inkjet 2.5 |
| Print Height | 1-12.7mm Maximum |
| Print Resolution | 300dpi Maximum |
| Interface | USB, Photocell |
| Adapter | AC input 100-240V, DC output 16.8V/2A |
| CPU | Quad Core 1.4GHz |
| Print Distance | Best Quality with 2-5mm |
| Weight | 1.12kg |
| Material of Printer | ABS |
| Operation System | Linux |
| Battery | 2600mAh @DC16.8V |
| Ink Type | Solvent Base 42ml, Waterbase 42ml |
| Ink Color | Black, White, Red, Blue, Yellow, Green, Invisible |
| Print Content | Chinese, English, Number, Symbols, QR Code, Bar Code, Pictures, Dates, Counter, Variable Data |
| Print Media | Boards, Carton, Stone, Pipe, Cable, Metal, Plastic, Electronic, Automotive Parts. |
| Language | Chinese, English, Turkish, Arabic, Persian, Germany |
| Dimension | 242x120x125mm |



Hand-held Hot Foaming Inject Printer

HUALIAN MACHINERY

| | |
|-----------------------|---|
| Model | SC-12 |
| Processor | Quad-core processor, Clocked at 1.4GHZ |
| System | LINUXS |
| Printing Content | Chinese, English, Mathematics, Symbols, Pictures, QR Codes, Barcodes, Variable Data |
| Ink Color | Red, Yellow, Blue, Green, Black, White |
| Printing Height | 12.7mm/25.4mm Dual Size Optional |
| Application Industry | Planks, Cartons, Stones, Pipes, Cables, Metals, Plastics, Electronic Devices, Auto Parts, Etc |
| Weight | 1.2Kg |
| Dimension | 750x350x470mm |
| Adapter Parameter | 110-220V AC Input; 16.8V 2A DC Output |
| Inkjet Print Distance | 2-10mm |
| External Interface | USB/Photoelectric/Charging |



Paper paging machine suitable for bag, plastic bag, paper carton, paper bag, label, IC card and IP card, etc.
This paging can use with date printing machine and ink printer.

KING PACK

| | | |
|-------------------|----------------|----------------|
| Model | HZ-1500 | HZ-1400 |
| Power | 250W | 120W |
| Product Length | 40-320mm | - |
| Product Width | 70-280mm | - |
| Product Thickness | 0.02-5mm | - |
| Machine Size | 1450x540x900mm | 1500x250x780mm |
| Weight | 43kg | 23kg |

 **PT. SINAR HIMALAYA** | Since 1974

Head Office :

Jakarta

Jl. Pangeran Jayakarta, Komp 117, Blok A No. 8-10
Jakarta Pusat 10730

Phone : (021) 6599 657, 6249 282

Fax : (021) 6497 850, 6008 474

Mail : sh@sinarhimalaya.com

Branch Office :

Surabaya

Jl. Kedungdoro No. 36-46 Blok 6-7, Surabaya 60251

Phone : (031) 5322 160, 5342 735, 5344 035

Fax : (031) 5316 113

Mail : shsby@sinarhimalaya.com

Semarang

Jl. Majapahit No. 119A, Semarang 50161

Phone : (024) 6711 822, 6711 829, 7692 8639

Fax : (024) 7674 1786

Mail : shsmr@sinarhimalaya.com

Medan

Jl. T. Amir Hamzah No. 50 C-D, Medan 20117

Phone : (061) 8008 9000, 8008 9054

Fax : (061) 8008 9104

Mail : shmdn@sinarhimalaya.com

Follow Us On :

 www.sinarhimalaya.com

 @Sinar_Himalaya

 Sinar Himalaya

 Sinar Himalaya

 08558833404

